
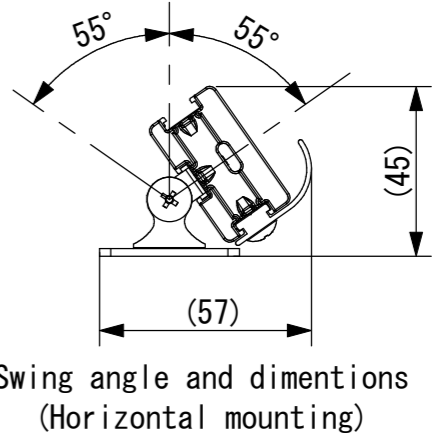
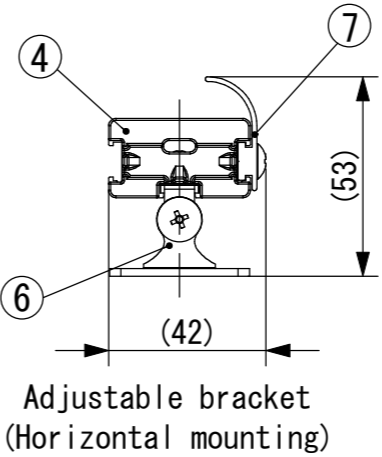
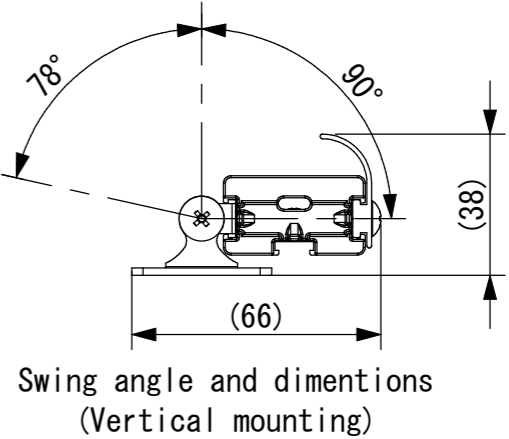
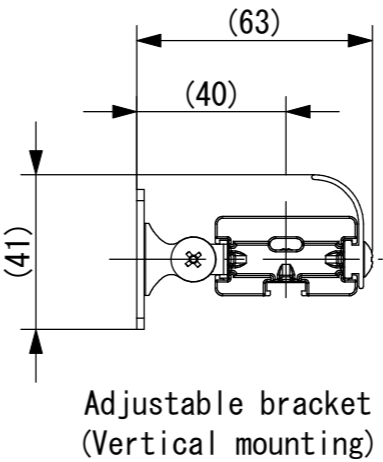
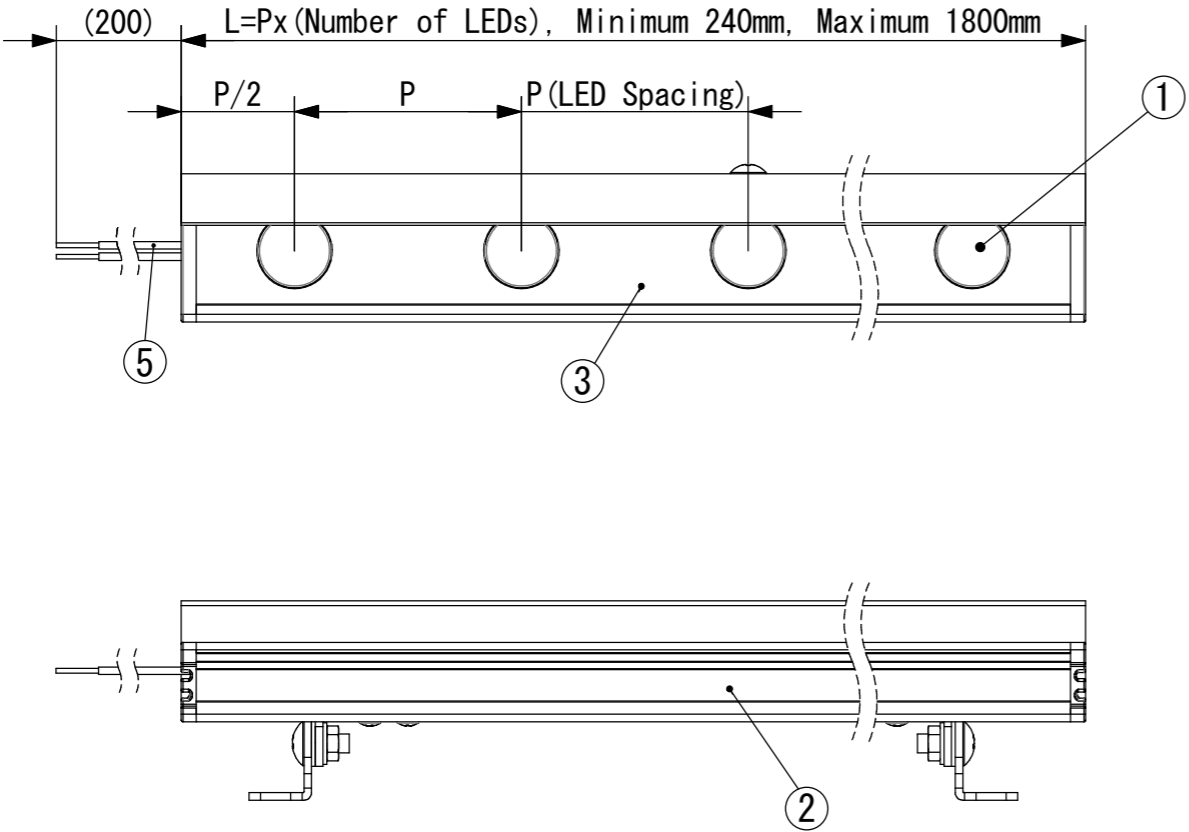


Specifications	
Current	: 700mA
Power	: 2.1W/LED
LED Spacing	: 60mm, 75mm, 100mm
Number of LEDs	: 4 to 18 LEDs
Color temperature	: 2700K, 3000K, 3500K, 4000K
Beam angle	: SP (Spread/40° x 15° ), 15D (15° )
CRI	: 85

\* Do not work on live wires.  
\* Dedicated constant current LED power supply is required.

P/N configuration : GRHB- - K-  
LED spacing      Color temp.      Beam angle

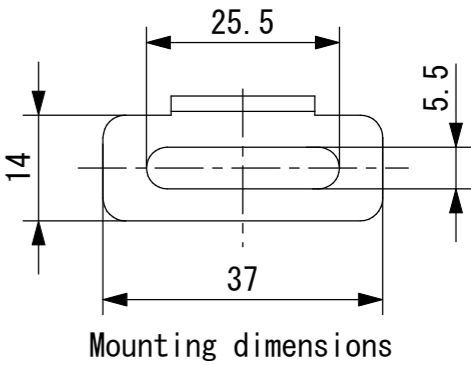

7	Glare guard louver	SUS	Surface treatment : Black almite Cut-off angle : 33° P/N : GRHB-GLVR (optional parts)
6	Adjustable bracket	SUS	P/N : GRHB-ADJB_ (optional parts) Qty. /set
5	Lead cable		AWG18×2 [ RED + , BLACK - ]
4	End plate	PC	Black
3	Cover	AL	Surface treatment: Black almite
2	Extrusion	AL	Surface treatment: Black almite
1	LED lens cover		
No.	部品 Parts	材料 Material	備考 Memo

Date 日付 2016. 6. 8  
Draft 製図 Hirai  
Check 検図 Miwa  
Approve 承認 Ichibiki

Scale 縮尺 1:2  
Weight 重量 xxkg/ ()  
Unit 単位 mm  
Size 用紙 A3

Title Gradient HB with  
名称 Adjustable Bracket & Glare Guard Louver  
Product No. GRHB- - K-  
製品番号 (GRHB-ADJB\_ & GRHB-GLVR)  
TOKI CORPORATION  
トキ・コーポレーション株式会社