
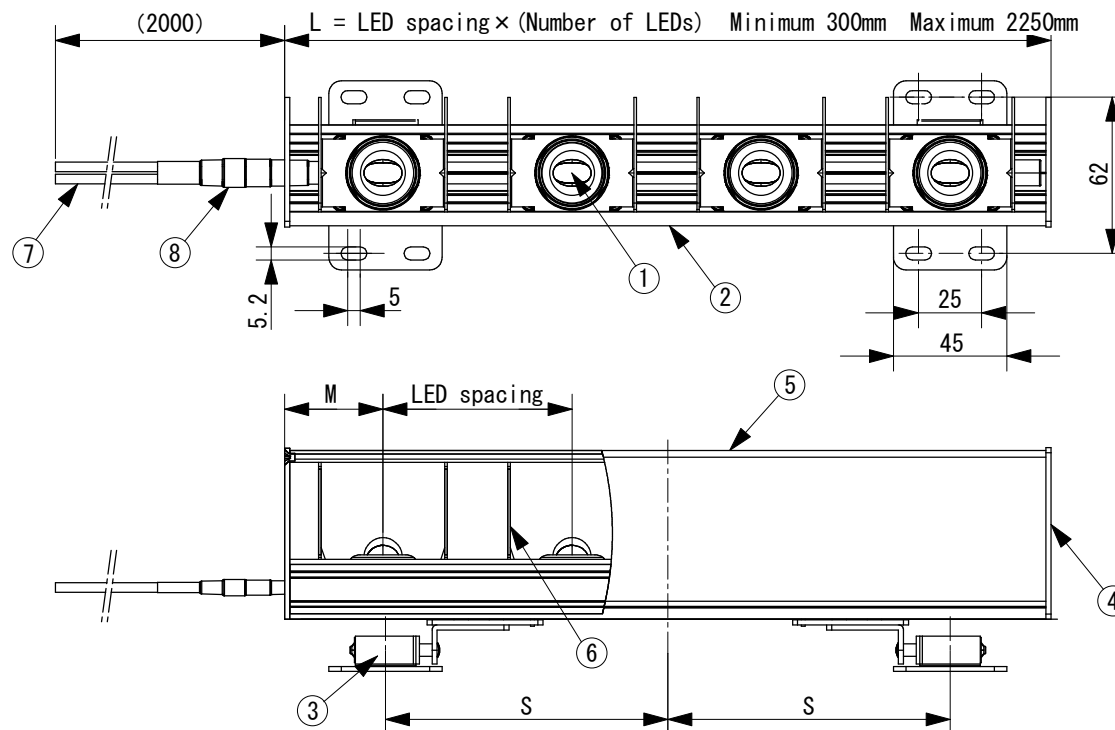


This illustration is
Beam angle:SP

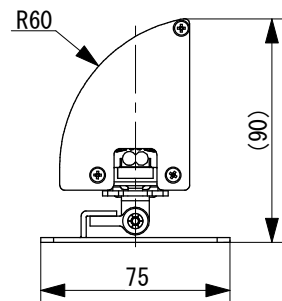

L: Length	S: Distance from channel center to both bracket centers
300~ 799mm	125mm
800~1499mm	250mm
1500~1999mm	500mm
2000~2250mm	600mm

Specifications	
- Voltage	: 24VAC
- Power	: 1.8W/LED
- LED Color	: 24K (2400K)
	: 27K (2700K)
	: 30K (3000K)
	: 42K (4200K)
	: 50K (5000K)
- Beam Angle	: SP (Spread)
- IP rating	: IP66 (outdoor use)

Product number	LED spacing	M	Power consumption	LED Q'ty/run	Weight
RWCX02P-75_K-SP-L	75 ± 3mm	(37.5)	24 W/m	4~30 LEDs	1650 g/m
RWCX02P-100_K-SP-L	100 ± 4mm	(50)	18 W/m	3~22 LEDs	1500 g/m

No.	Parts 部品	Material 材料	Memo 備考
8	Heat shrink tubing		
7	Lead cable	PVC	AWG14×2C
6	L-shaped fin	AL	Black
5	Louver	AL	Black
4	End plate	SUS	Black
3	Adjustable bracket	SUS	Sold separately. Suitable screws (dia. 4-5mm) required.
2	Channel	AL	Black
1	Body		Reveler, Beam angle: SP

Date 日付 2022/7/1

Draft 製図 Y. Terabe

Check 検図 T. Inaba

Approve 承認 C. Ishibiki

Scale 縮尺 1:3

Weight 重量 —

Unit 単位 mm

Size 用紙 A4

Title REVELER CX WITH PARTITION-GUARD
WITH ADJUSTABLE BRACKET

Product No. RWCX02P- — K-SP-L + RWCX-ADJB2-OP
製品番号 LED Spacing LED Color

TOKI CORPORATION
トキ・コーポレーション株式会社