



■Lens cover (scale 1:2)


Standard cover

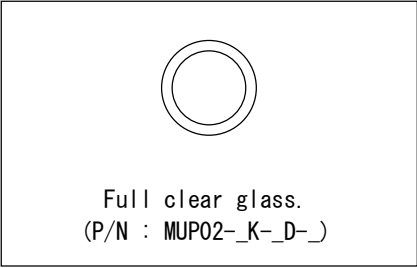



Glare-cut cover

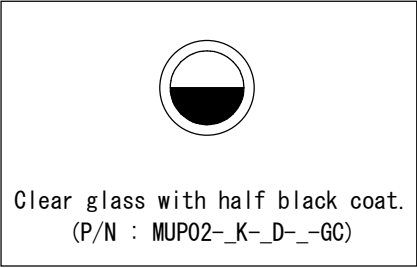


■Accessories (Scale : 1:2)

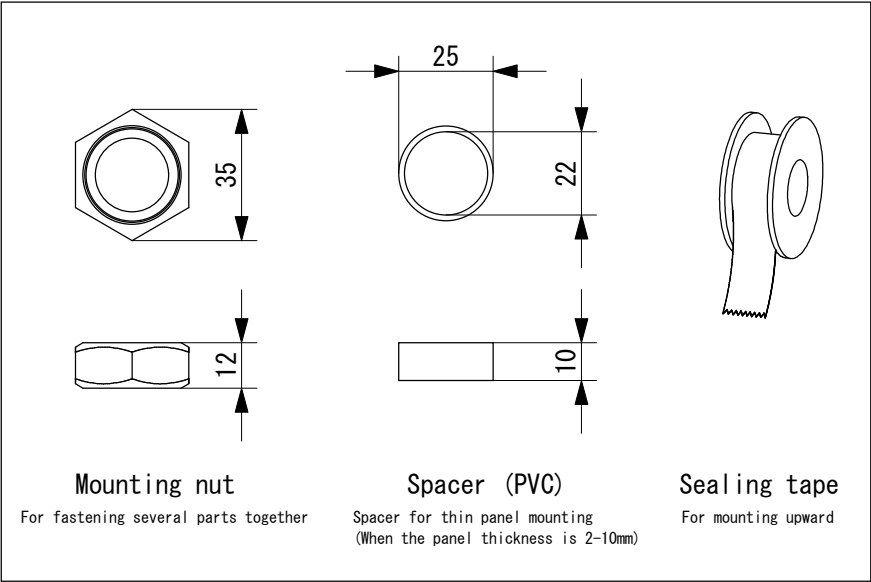


In case of non-dimming wiring :
Connect the white wire (dimming) to the
black wire (-).

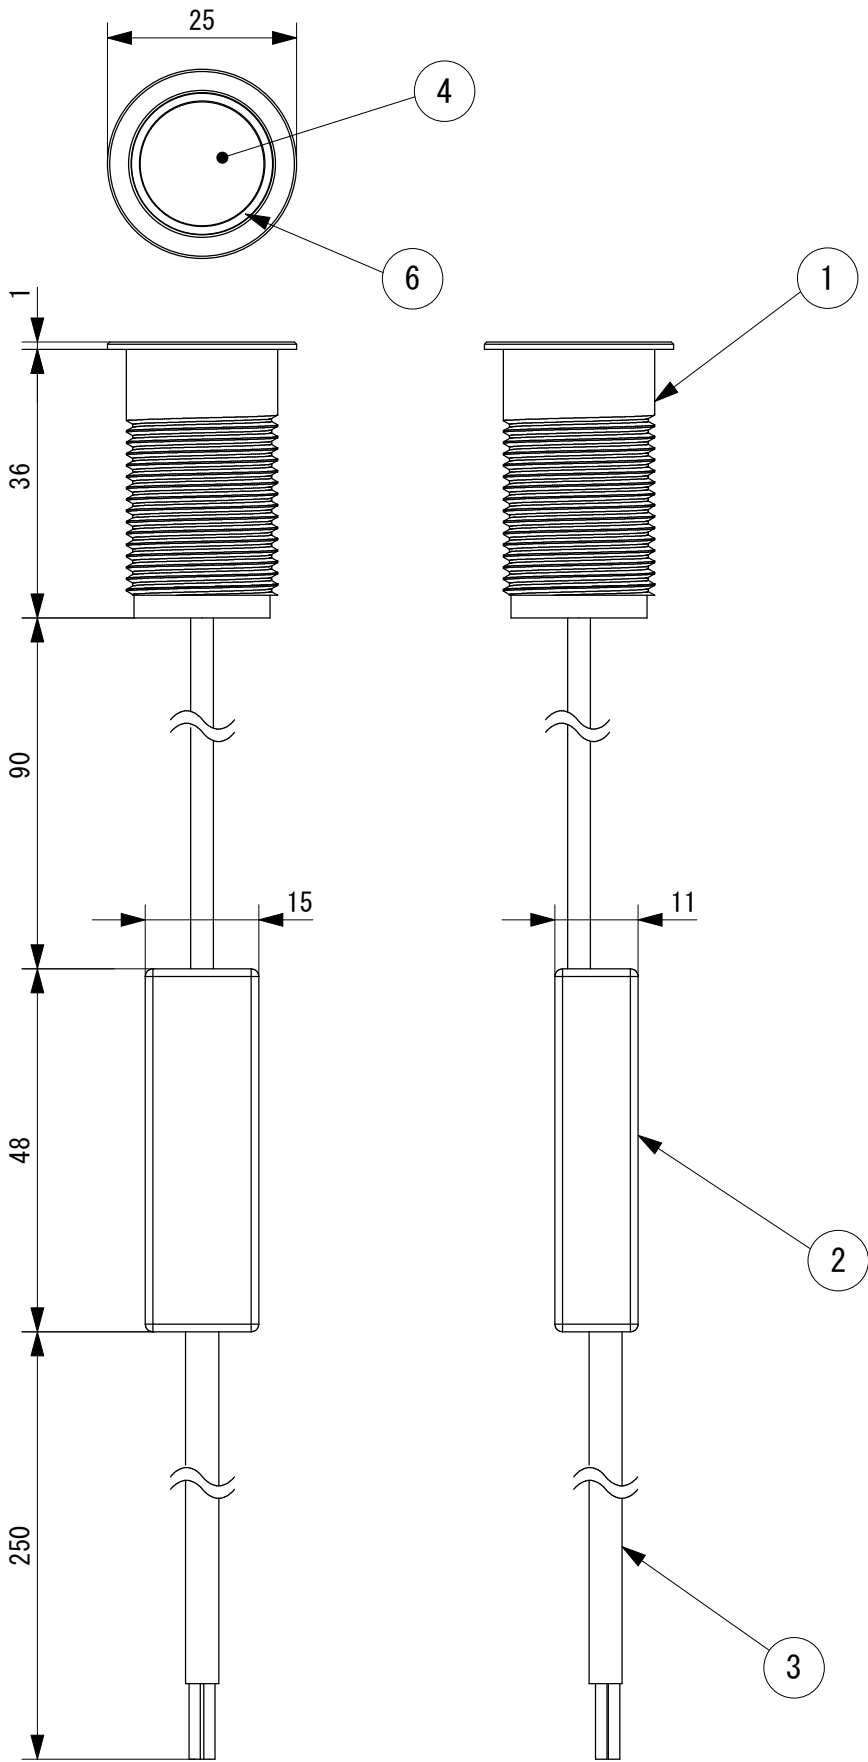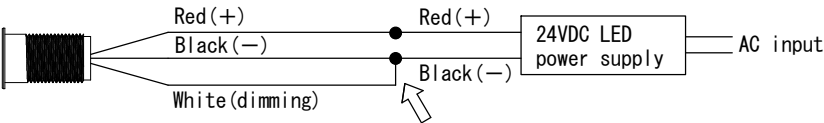

■Cutout dimension

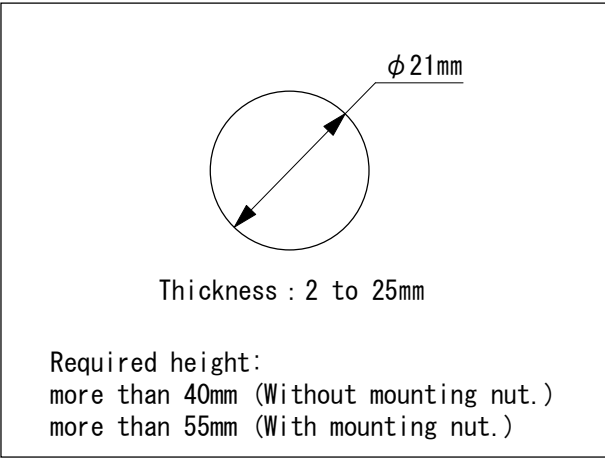


■Installation (Scale : 1:2)

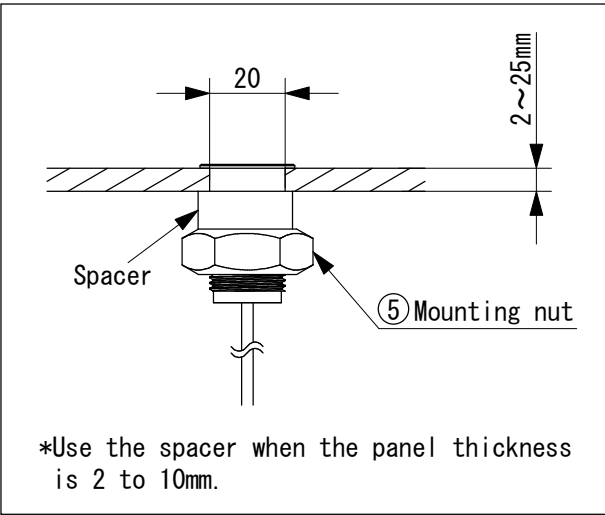

Specifications

- Voltage : 24VDC
- Wattage : 2.6W
- Color temp. : 2700K (27K)
3000K (30K)
3500K (35K)
4000K (40K)
- Beam angle : 16° (16D)
24° (24D)
- CRI : 85
- Body color : Black (B), Silver (S)
- * For Indoor Use

6	Cone	AL	Glareless cone
5	Mounting nut	Iron	
4	Lens cover	Tempered glass	t=3.0mm
3	Lead cable	PVC	φ 4. 4 (AWG21 × 3C)
2	Control circuit	PA	
1	Body	AL	Alumite finish
No.	Parts 部品	Material 材料	Memo 備考



Date 日付	2019. 10. 8	Scale 縮尺	1:1	Title 名称	Micro Up Light
Draft 製図	Y. Terabe	Weight 重量	40g	Product No.	MUP02-K-D-_-
Check 検図	T. Inaba	Unit 単位	mm	製品番号	Color temp. Beam angle Body color Glare-cut cover
Approve 承認	C. Ishibiki	Size 用紙	A3		

