



● Mounting

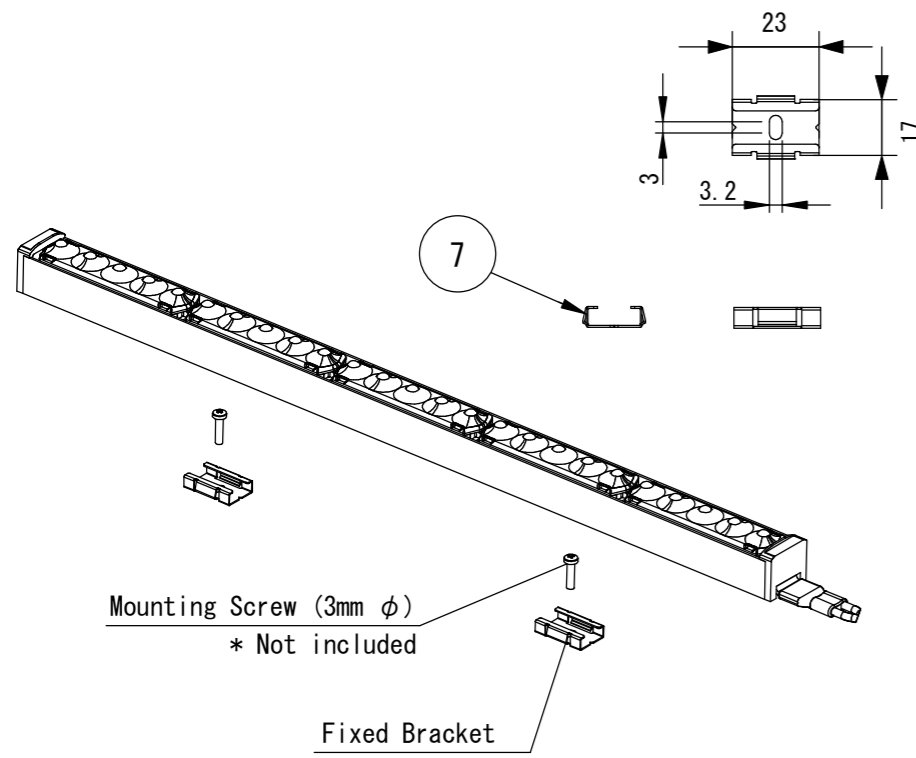

● Parallel Louver Mounting (Optional)

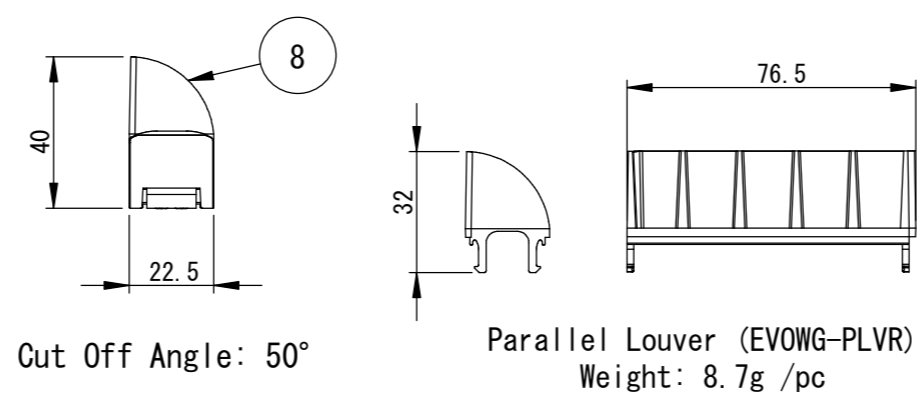

Specifications


- Voltage : 24VDC
- Wattage : 1.5W /unit
- LED Color : 2700K (27K)
3000K (30K)
3500K (35K)
- Beam Angle : 42° (42D)
- CRI : 85
- Mounting Directions: Floor, Ceiling, Wall

*Additional Fixed Brackets are required for wall mounting

* This product is for indoor use only.

* Keep a distance of 100 mm or more from the light source to the illuminated object, or it may cause discoloration or deterioration of the objects.

7	Parallel Louver	PC/ABS	Optional EVOWG-PLVR, Black
6	Fixed Bracket	SUS	Included
5	Cord Protector	PVC	White
4	Lead Wire	PVC	
3	End Cover	PC	
2	Aluminum Extrusion	Aluminum	Black Anodized
1	LED Light Source	PC	
No.	Parts 部品	Material 材料	Memo 備考

Date 日付	2021. 2. 17	Scale 縮尺	1:2	Title 名称	Tokilux EVOWG
Draft 製図	Odaka	Weight 重量	Approx 410g/m	Product No. 製品番号	TLX-EVOWG-__K LED Color
Check 検図	Inaba	Unit 単位	mm	 TOKI CORPORATION トキ・コーポレーション株式会社	
Approve 承認	Ishibiki	Size 用紙	A3		