




■Dimensions with Minimal Track Rail

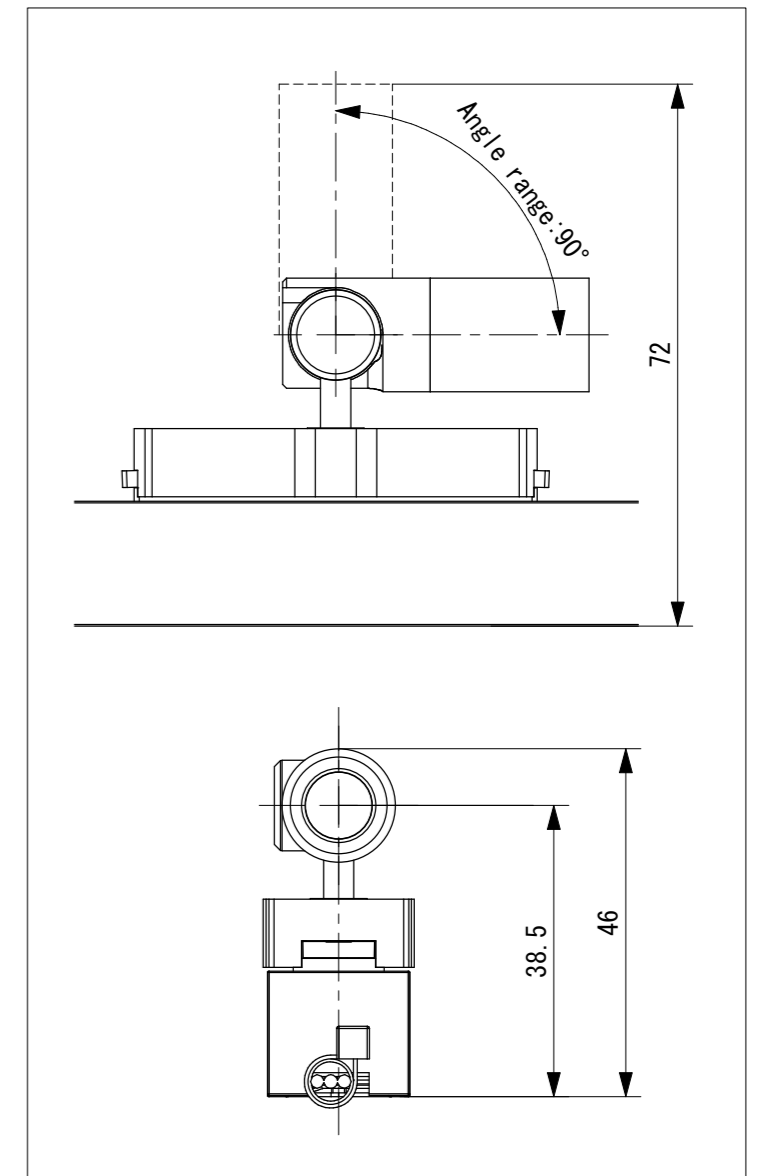

■Installation
(Items ② ③ ④ are sold separately)

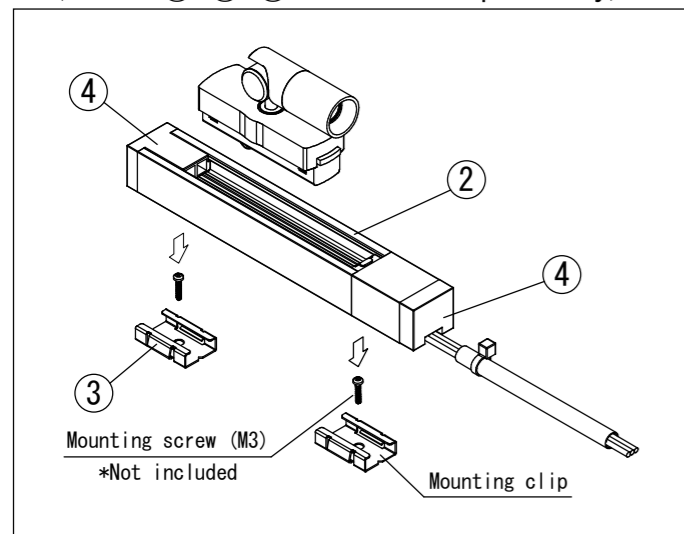


■Minimum Space Requirements (Scale 1:2)

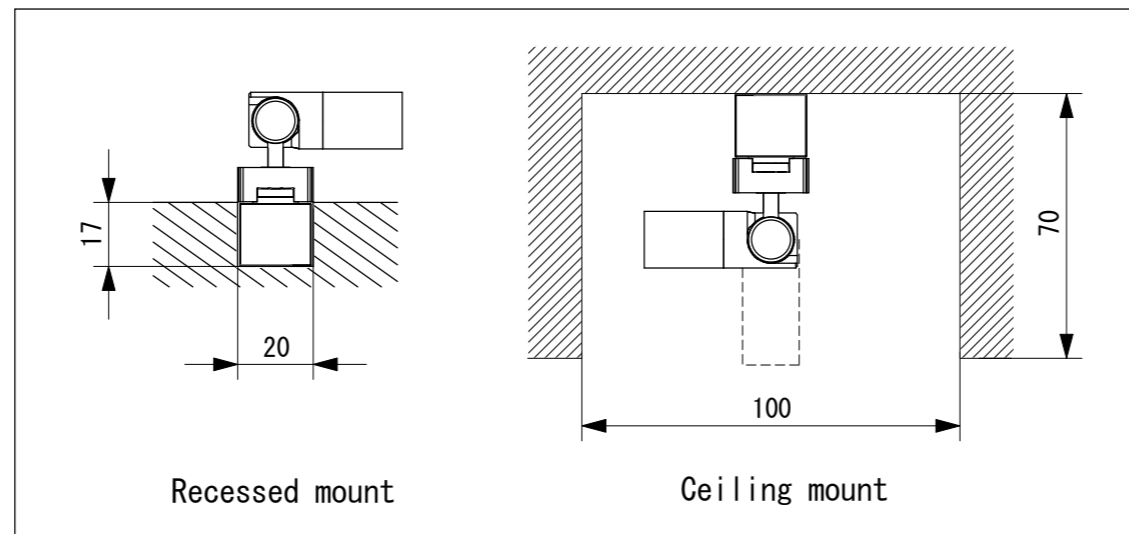

Specifications

- Voltage : 24VDC
- Wattage : 2.6W
- LED Color: 2700K (27K, HC27K)
3000K (30K, HC30K)
3500K (35K, HC35K)
4000K (40K, HC40K)
5000K (50K, HC50K)
- Beam Angle: 16° (16D), 24° (24D), 30° (30D)
- CRI : 85 (Standard)
95 (HC, High color rendering)
- Body Color: Black (B), Pure White (PW)

5			
4	Feeder Set		MIN-LC-B (PW), Lead wire AWG20x3 Sold separately
3	Mounting Clip	SUS	Attached to Minimal Track Rail
2	Minimal Track Rail	AL	MIN-TK24V-B (PW) Length: 0.2m-2.4m Sold separately
1	Micro Light Cannon	AL	
No.	Parts 部品	Material 材料	Memo 備考

Date 日付	2019/5/7	Scale 縮尺	1 : 1	Title 名称	Micro Light Cannon
Draft 製図	Terabe	Weight 重量	33g (Main Unit)	Product No. 製品番号	MLC02- <u> </u> - <u> </u> - <u> </u> - <u> </u>
Check 検図	Inaba	Unit 単位	mm		LED Color Beam Angle Body Color
Approve 承認	Ishibiki	Size 用紙	A3	 TOKI CORPORATION トキ・コーポレーション株式会社	