



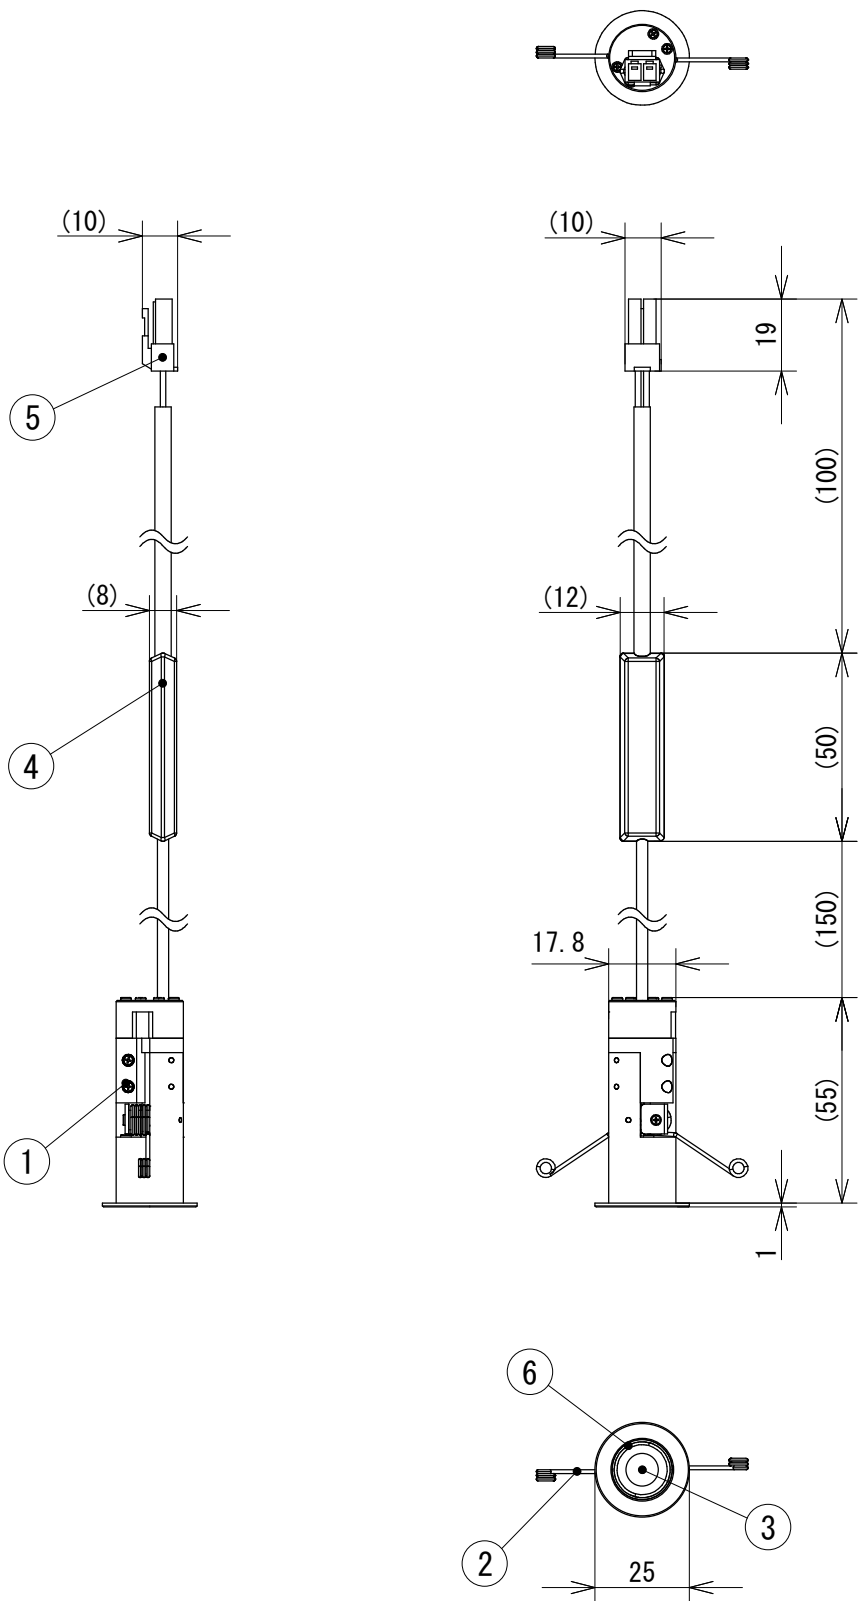

■Cutout dimension

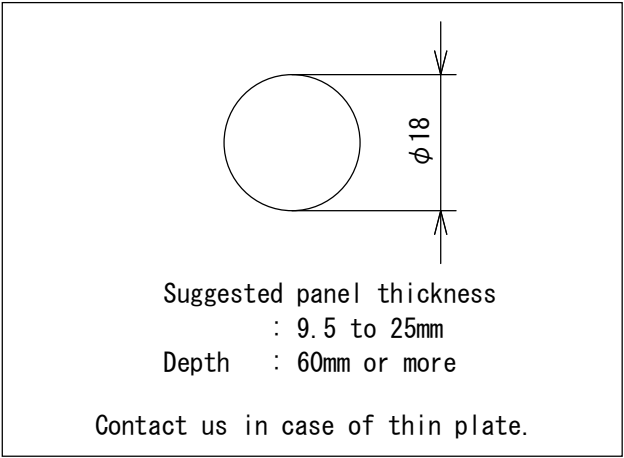

Specifications

- Current : 700mA (Note 1)
- Wattage : 2.1W
- Color Temp. : 2700K (27K)
3000K (30K)
- Beam Angle : 16° (16D)
24° (24D)
- CRI : 85
- Corn Color : Black finish (BC)
Mirror finish (PL)
- Body Color : Black (B)
White (W) (Equivalent to N93)
- Cut-off Angle : 35°

Note

1. Constant current driver is required. It cannot be insert from the cutout.
2. Wiring after pasting the ceiling board is difficult, We recommend the pre-wiring.
3. Do not use the product while it is covered with heat insulating material or soundproofing material.
4. Connect the optional feed connector and connect the white wire side to the + side of the driver.
5. Use the optional MPD-SPL2 for branch wiring.
In case wiring in parallel without using MPD-SPL2, the rated current will not be obtained, and it will be dark.

6	Cone	AL	Black / Mirror plating
5	Input connector	PA	
4	Protection circuit	PA	
3	Lens	PMMA	
2	Spring	SUS	
1	Body	AL	White paint / Black alumite
No.	Parts 部品	Material 材料	Memo 備考

Date 日付 2019. 10. 23

Draft 製図 Y. Terabe

Check 検図 T. Inaba

Approve 承認 C. Ishibiki

Scale 縮尺 1:2

Weight 重量 40g

Unit 単位 mm

Size 用紙 A3

Title 名称 MICRO PINHOLE DOWNLIGHT

Product No. 製品番号 MPD02- K- D- -
Color temp. Beam angle Cone Color Body color

 TOKI CORPORATION
トキ・コーポレーション株式会社