
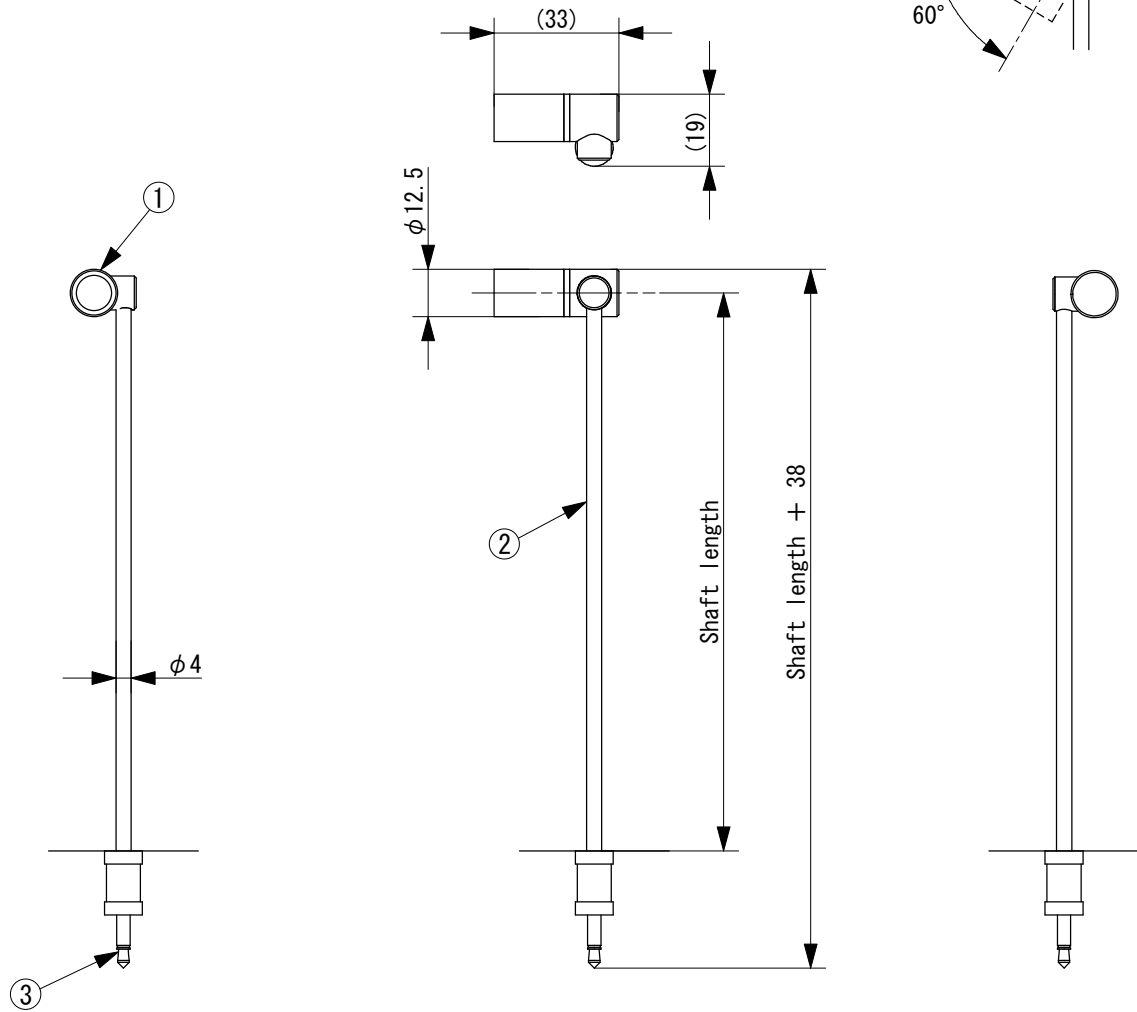


Specifications	
- Voltage	: 5VDC
- Wattage	: 1.2W/LED
- LED Color	: 2700K (27K, HC27K) 3000K (30K, HC30K) 3500K (35K, HC35K) 4000K (40K, HC40K) 5000K (50K, HC50K)
- Beam angle	: 16° (16D) 24° (24D) 30° (30D) 80° (80D, custom)
- CRI	: 85 (Standard) 95 (HC, High color rendering)
- Body color	: Black (B), Silver (S)
- Shaft length	: 30, 150, 250, 350

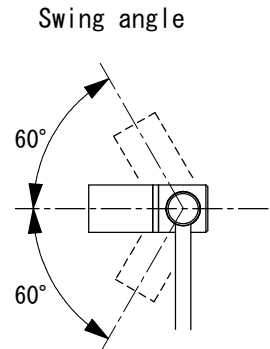


4			
3	Phone Connector		
2	Shaft	SUS	Black:Sinter coating, Silver:Material
1	Head	AL	Black・Silver:Anodized aluminum finish
No.	Parts 部品	Material 材料	Memo 備考

P/N Configuration :

**MSP01 - 30K - 30D - S - 150**

LED Color    Beam Angle    Body Color    Shaft Length

Date 日付 2011/10/7  
 Draft 製図 Y. Terabe  
 Check 検図 T. Inaba  
 Approve 承認 C. Ishibiki



Scale 縮尺 1:2  
 Weight 重量 \*\*\*g  
 Unit 単位 mm  
 Size 用紙 A4

Title 名称 Micro Spotlight  
 Product No. 製品番号 MSP01-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

