
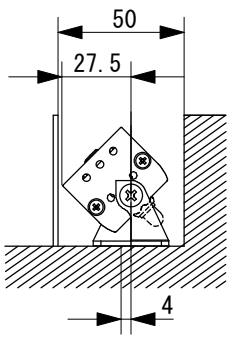


Adjustable Bracket
(Not to Scale)

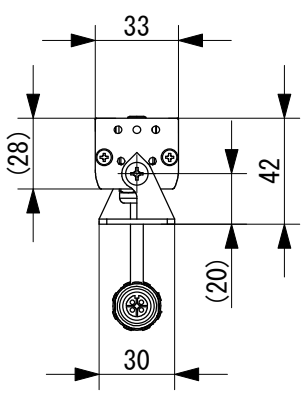


When tilting an extrusion within the minimum installation dimension, offset the center axis of the fixture installation by about 4mm.

Specifications				
• LED spacing : 75mm				
• Color temperature : 30K (3000K) 40K (4000K)				
• Beam angle : 15D (15°) SP (Spread/40° x 15°) 08D (8°, custom)				
• CRI : 85				
• IP rating : IP66				


Length (mm)	Number of LEDs	Voltage (VDC)	Power consumption (W)	Weight (g)
L300	4	24	12	400
L600	8		24	750
L900	12		36	1100

- ※ DC power supply for LEDs is required. (LDR24-96)
- ※ Make sure that the waterproof connectors are clean and free of foreign matter.
Please tighten the connectors well till the last for no slack.
- ※ Be sure to attach the waterproof End Cap to the last fixture in series.
- ※ When extending the GRX Lead Cables, be sure to perform waterproofing and insulation treatment as a whole.
- ※ The feed connection can be up to 2.4m (4A@24VDC/output) for the total length of the fixtures, when installed without any gaps.
When the lighting fixtures are spaced apart from each other, the number of connectable devices will vary depending on the voltage drop.
Please contact us for details.

■ Minimum installation space

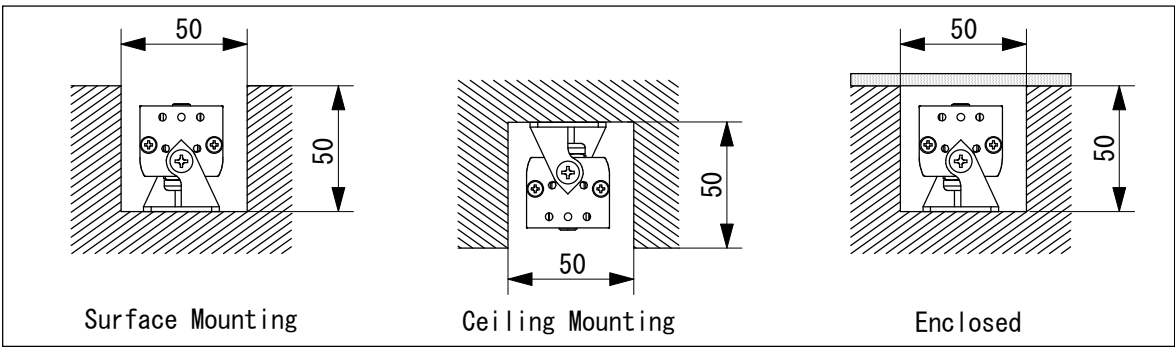

■ Option

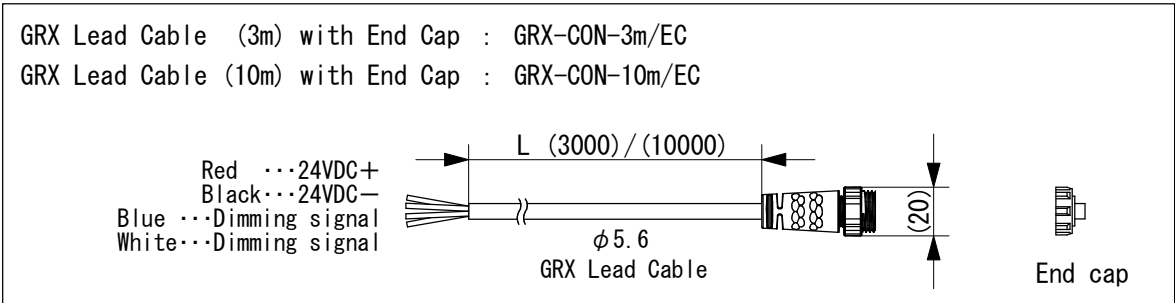

6	Power cable with Connector (output)	PVC/PA6	
5	Power cable with Connector (input)	PVC/PA6	
4	LED Lens Cover	PC	
3	Mounting Bracket	SUS	Surface treatment:Black paint
2	Cover	AL	Surface treatment:Black paint
1	Extrusion	AL	Surface treatment:Black paint
No.	Parts 部品	Material 材料	Memo 備考

Date 日付	2022/3/15	Scale 縮尺	1:3	Title 名称	GRADIENT OUTDOOR Standard
Draft 製図	Terabe	Weight 重量	***	Product No.	GRX02- K- D-L
Check 検図	Inaba	Unit 単位	mm	製品番号	Color temp. Lens Length
Approve 承認	Ishibiki	Size 用紙	A3		

TOKI CORPORATION
トキ・コーポレーション株式会社