| 2024/7/4 Rev.1 | 2024/7/4 TSC-0209_6 |
|---|---|

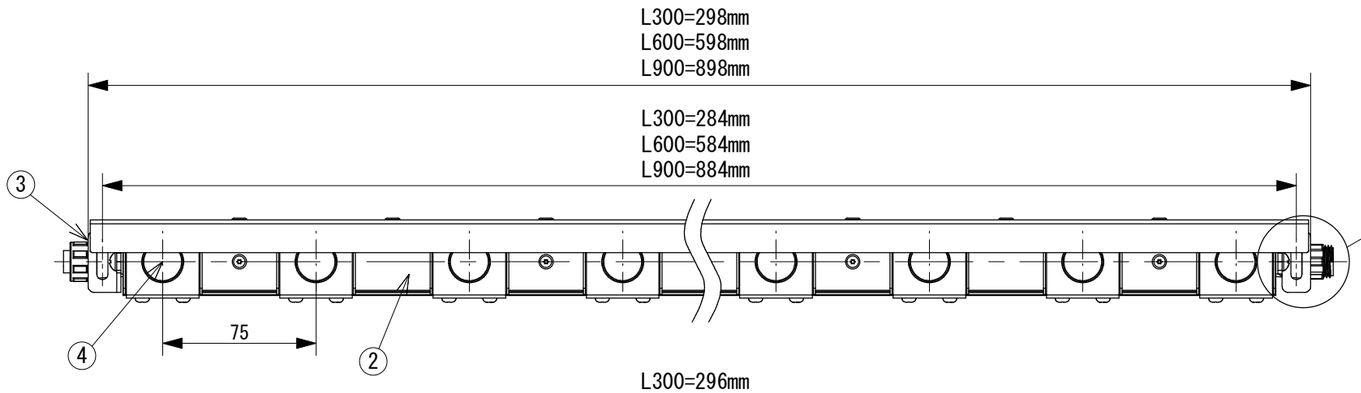


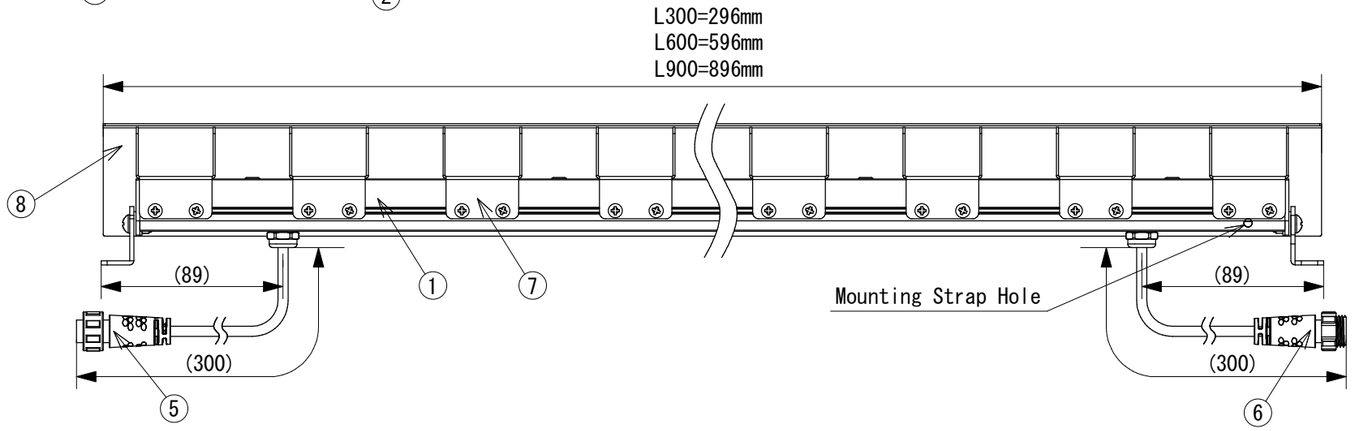








Adjustable Bracket

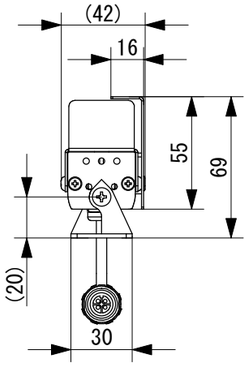





When tilting an extrusion 90°, the minimum installation space is shown above and offset the center axis of the fixture installation by about 14mm.

## ■Minimum installation space

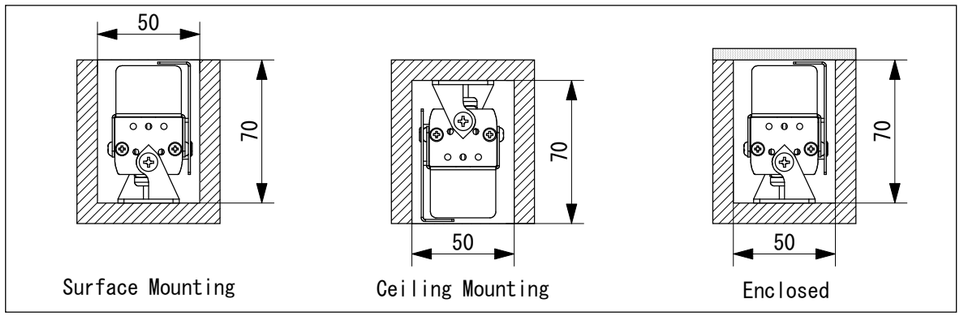


| Specifications | | |
|---|---|---|
| ・ LED spacing | : | 75mm |
| ・ Color temperature | : | 30K(3000K)<br>40K(4000K) |
| ・ Beam angle | : | 15D(15° )<br>SP(Spread/40° x 15° )<br>08D (8° ,custom) |
| ・ CRI | : | 85 |
| ・ IP rating | : | IP66 |

| Length (mm) | Number of LEDs | Voltage (VDC) | Power consumption (W) | Weight (g) |
|---|---|---|---|---|
| L300 | 4 | 24 | 12 | 780 |
| L600 | 8 | | 24 | 1500 |
| L900 | 12 | | 36 | 2300 |

※ DC power supply for LEDs is required. (LDR24-96)
※ Make sure that the waterproof connectors are clean and free of foreign matter.
Please tighten the connectors well till the last for no slack.
※ Be sure to attach the waterproof End Cap to the last fixture in series.
※ When extending the GRX Lead Cables, be sure to perform waterproofing and insulation treatment as a whole.
※ The feed connection can be up to 2.4m (4A@24VDC/output) for the total length of the fixtures, when installed without any gaps.
When the lighting fixtures are spaced apart from each other, the number of connectable devices will vary depending on the voltage drop.
Please contact us for details.

## ■Option

GRX Lead Cable (3m) with End Cap : GRX-CON-3m/EC
GRX Lead Cable (10m) with End Cap : GRX-CON-10m/EC

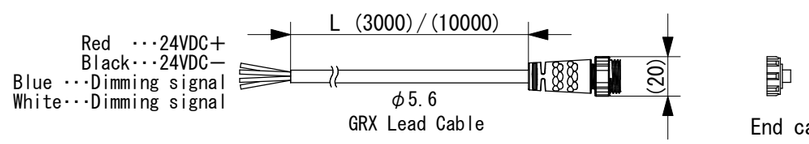


| No. | Parts 部品 | Material 材料 | Memo 備考 |
|---|---|---|---|
| 8 | L-Guard | SUS | Surface treatment:Black paint |
| 7 | Slit-Guard | SUS | Surface treatment:Black paint |
| 6 | Power cable with Connector(output) | PVC/PA6 | |
| 5 | Power cable with Connector(input) | PVC/PA6 | |
| 4 | LED Lens Cover | PC | |
| 3 | Mounting Bracket | SUS | Surface treatment:Black paint |
| 2 | Cover | AL | Surface treatment:Black paint |
| 1 | Extrusion | AL | Surface treatment:Black paint |

| | | | |
|---|---|---|---|
| Date 日付 | 2022/3/15 | Scale 縮尺 | 1:3 |
| Draft 製図 | Terabe | Weight 重量 | *** |
| Check 検図 | Inaba | Unit 単位 | mm |
| Approve 承認 | Ishibiki | Size 用紙 | A3 |

Title 名称: GRADIENT OUTDOOR with Partition-Guard

Product No. 製品番号: GRX02P- K- D-L
(K- : Color temp. / D-L : Lens / Length)

TOKI CORPORATION
トキ・コーポレーション株式会社