




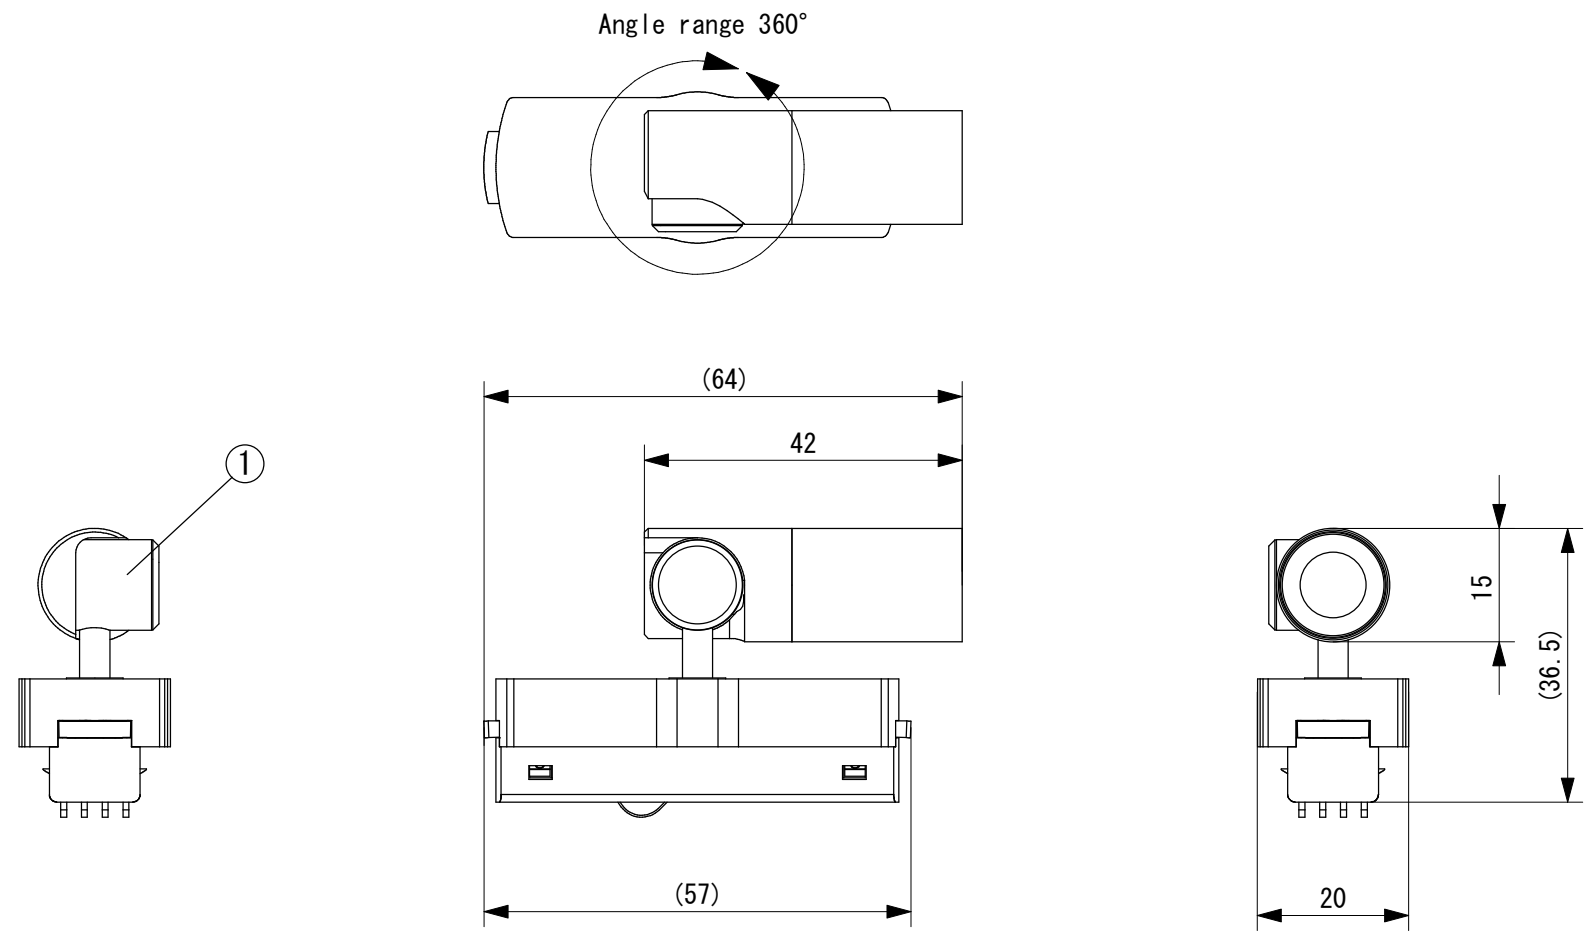


■Dimensions with Minimal Track Rail

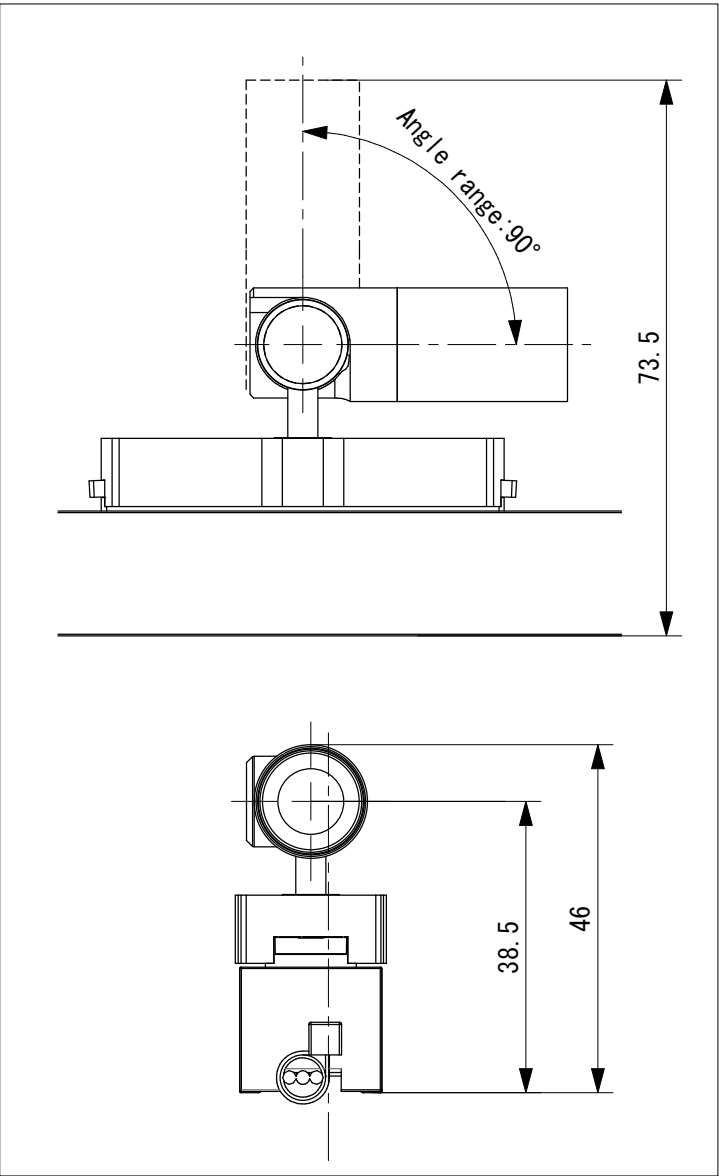

■Installation
(Items ② ③ ④ are sold separately)

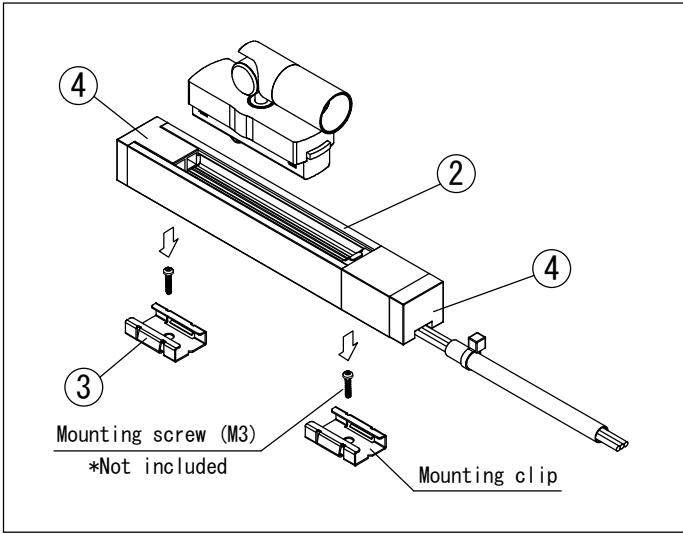

■Minimum Space Requirements (Scale 1:2)

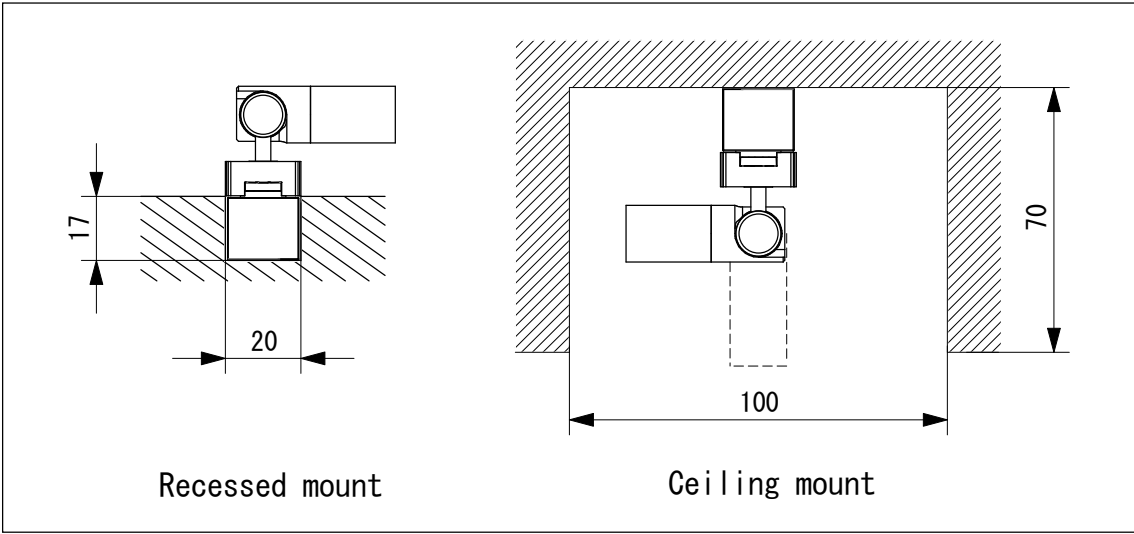

Specifications

- Voltage : 24VDC
- Wattage : 2.6W
- LED Color: 2700K (27K, HC27K)
3000K (30K, HC30K)
3500K (35K, HC35K)
4000K (40K, HC40K)
5000K (50K, HC50K)
- Beam Angle: 16° (16D), 24° (24D), 30° (30D)
- CRI : 85 (Standard)
95 (HC, High color rendering)
- Body Color: Black (B), Pure White (PW)


5			
4	Feeder Set		MIN-LC-B (PW) Lead wire AWG20x3 Sold separately
3	Mounting Clip	SUS	Attached to Minimal Track Rail
2	Minimal Track Rail	AL	MIN-TK24V-B (PW) Length: 0.2m-2.4m Sold separately
1	Micro Light Cannon	AL	
No.	Parts 部品	Material 材料	Memo 備考

Date 日付 2024/11/20

Draft 製図 Terabe

Check 検図 Inaba

Approve 承認 Ishibiki



Scale 縮尺 1:1

Weight 重量 33g
(Main Unit)

Unit 単位 mm

Size 用紙 A3

Title 名称 Micro Light Cannon

Product No. 製品番号 MLC03- K- D-

LED Color Beam Angle Body Color

