

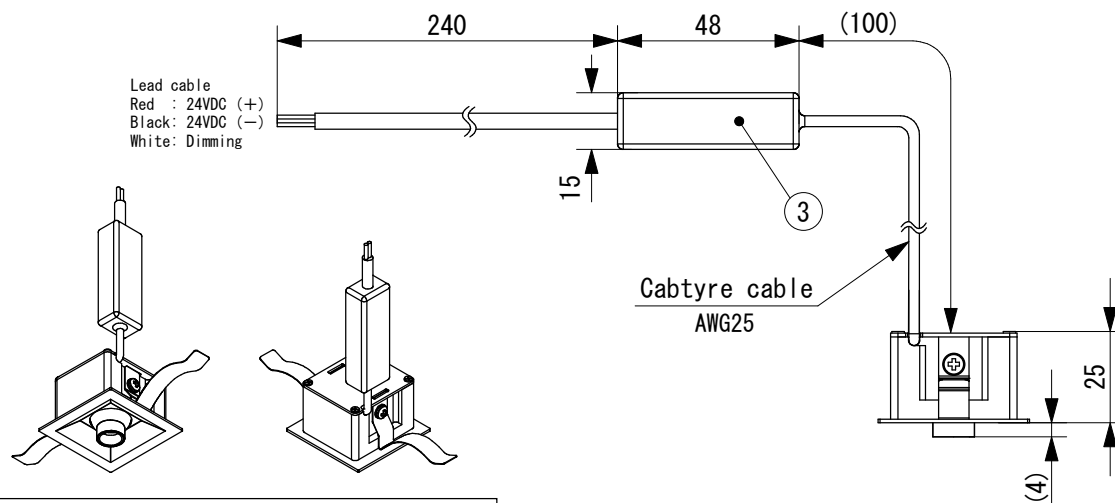
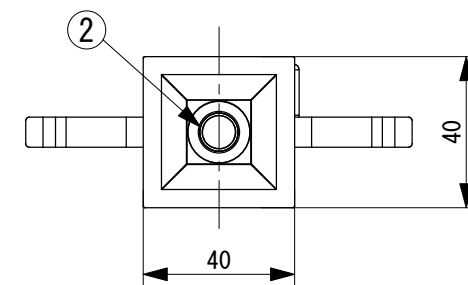
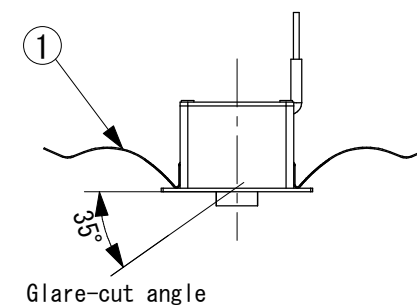


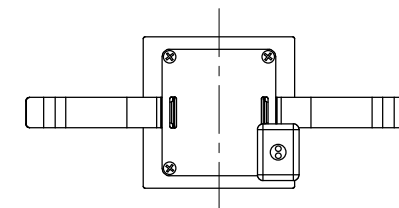

Power supplies are not included
(sold separately).

Specifications

- Voltage : 24VDC
- Wattage : 2.6W
- LED Color : 2700K (27K, HC27K)
3000K (30K, HC30K)
3500K (35K, HC35K)
4000K (40K, HC40K)
5000K (50K, HC50K)
- CRI : 85 (Standard)
95 (HC, High color rendering)
- Beam Angle : 16° (16D)
24° (24D)
30° (30D)
- Body Color : Black (B)
White (W)
- Weight : 50g (Main unit)
100g (incl. Control Circuit)

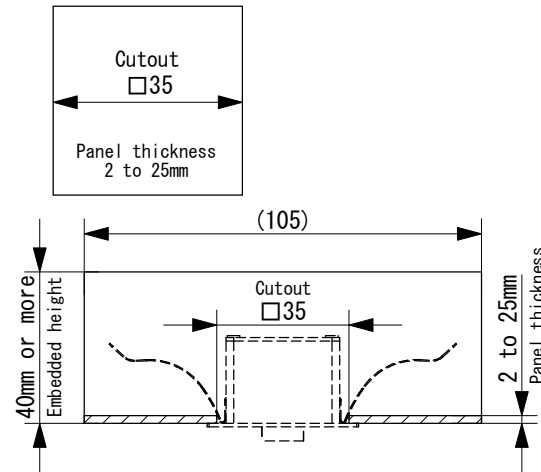

P/N configuration:

MDS01 - 30K - 30D - B

LED Color Beam Angle Body Color

6			
5			
4			
3	Control circuit		L48×W15×H11
2	Eyeball	Aluminum	
1	Body	Aluminum	
No.	Parts 部品	Material 材料	Memo 備考

Date 日付 2022/3/7

Draft 製図 Y. Terabe

Check 検図 T. Inaba

Approve 承認 C. Ishibiki

Scale 縮尺 1:2

Weight 重量 ***g

Unit 単位 mm

Size 用紙 A4

Title 名称 Micro Downlight Square

Product No. MDS01- K- D-
製品番号 LED Color Beam Angle Body Color

TOKI CORPORATION
トキ・コーポレーション株式会社