



\*For indoor use only.


Specifications	
- Voltage:	24VDC
- Wattage:	25.9W
- LED Color:	3000K (HC30K) 3500K (HC35K) 4000K (HC40K) 5000K (HC50K)
- CRI:	95
- Body Color:	B (Black) / C (Chrome plated)
- Lumen Value:	2196lm
- Dimming:	Dimmable with dedicated dimming system
- Tilt Angle:	90° left and right from below

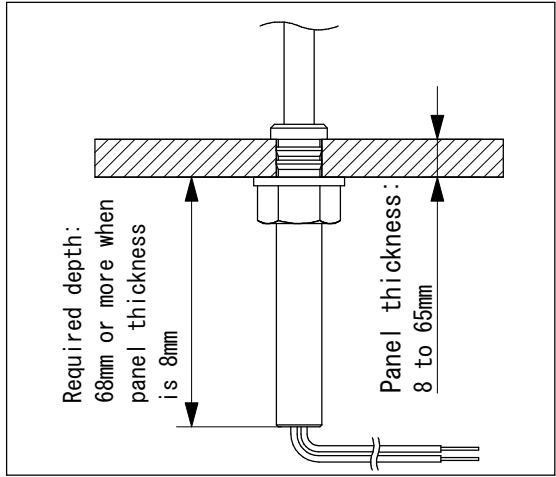



Overall view:

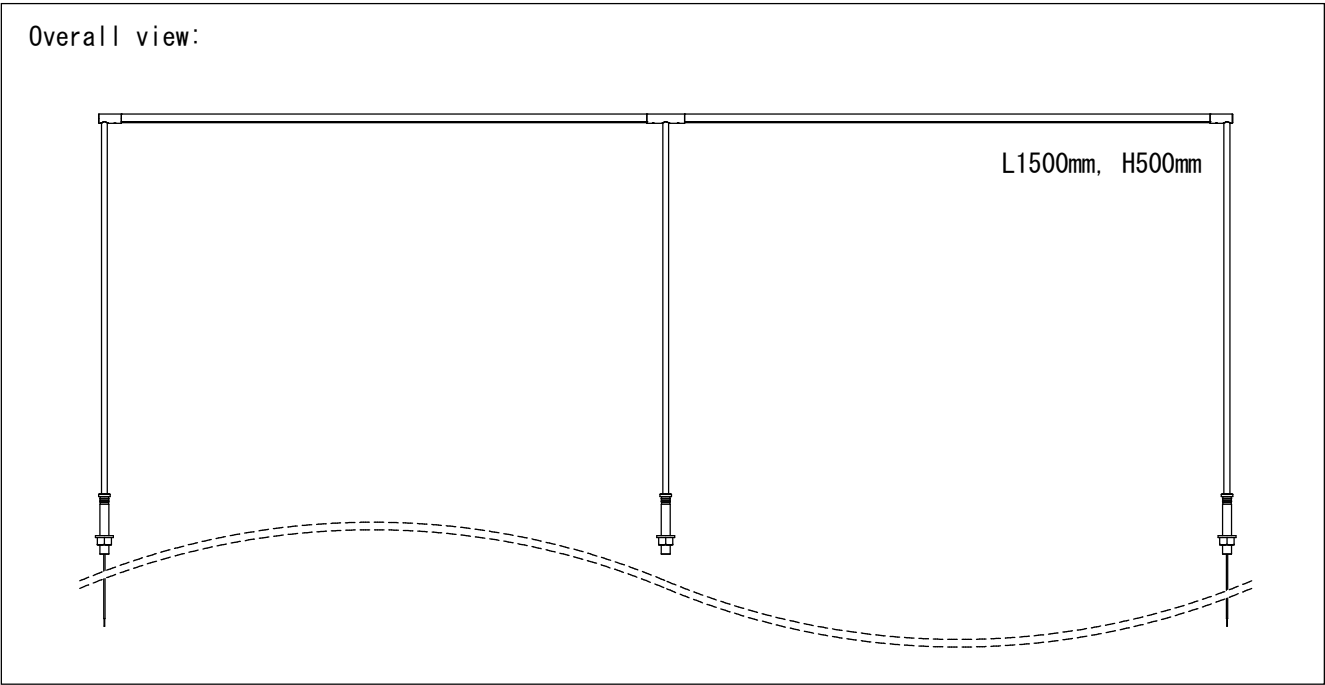

Cutout:



Accessory: DC power cable with one-touch connector  
(Not required when LPS-M-36-24 is not used)

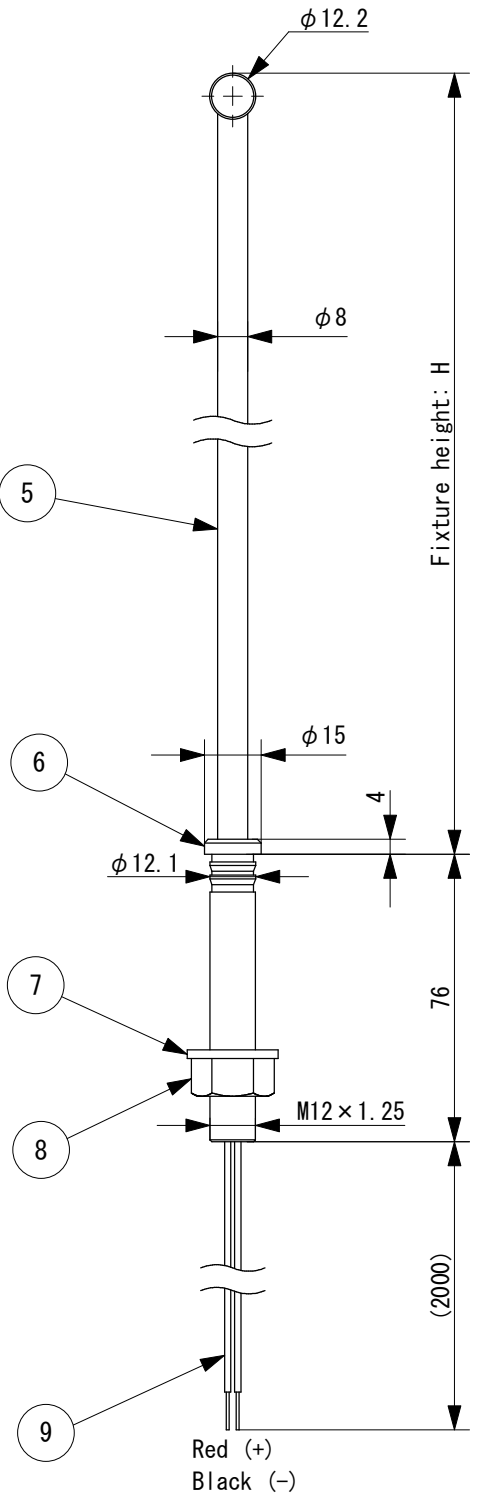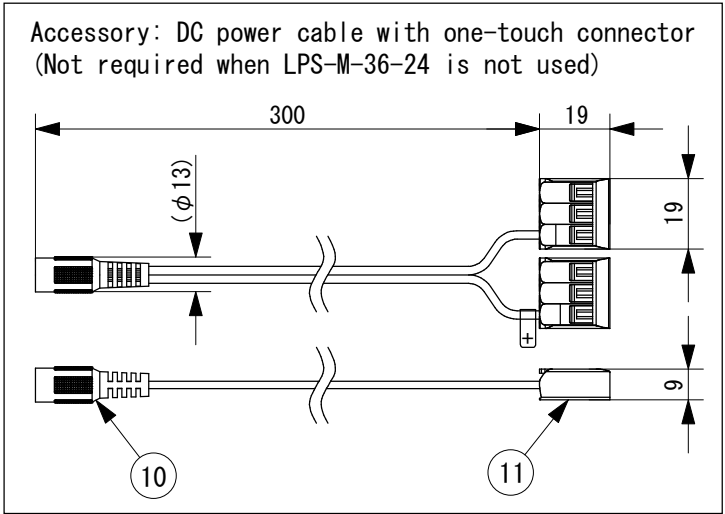

Fixture height (H) can be specified from 150 to 500mm,  
in increments 10mm.

11	One-Touch Connector	PC	
10	DC Power Cable	PVC	5.5mm x 2.1mm
9	Wire	PVC	AWG22 105° ,Heat Resistant
8	Nut	Iron	M12×1.25 Trivalent Chromate
7	Flat Washer	Iron	M12, Trivalent Chromate
6	Bolt	Brass	B:Black anodized / C:Chrome plated
5	Stem	Iron	B:Black paint / C:Chrome plating
4	Center Cap	Brass	B:Black anodized / C:Chrome plated
3	End Cap	Brass	B:Black anodized / C:Chrome plated
2	Chrome Plated	PC	Diffusion material contained
1	Body	Aluminum	B:Black anodized / C:Chrome plated
No.	Parts 部品	Material 材料	Memo 備考

Date 日付 2023/5/17

Draft 製図 Terabe

Check 検図 Ashikaga

Approve 承認 Inaba

Scale 縮尺 1:2

Weight 重量 \*\*\*g

Unit 単位 mm

Size 用紙 A3

Title 名称 Micro Display Barlight

Product No. 製品番号 MDB01-HC\_K-C-L1500  
LED Color

**TKI CORPORATION**  
トキ・コーポレーション株式会社