



● Mounting

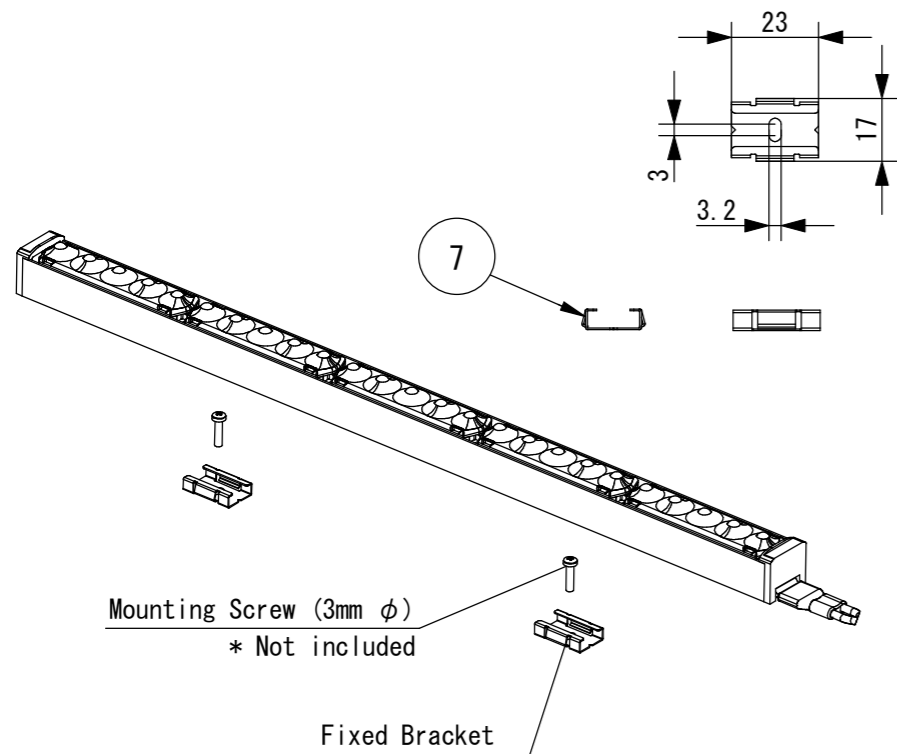

● Parallel Louver Mounting (Included)

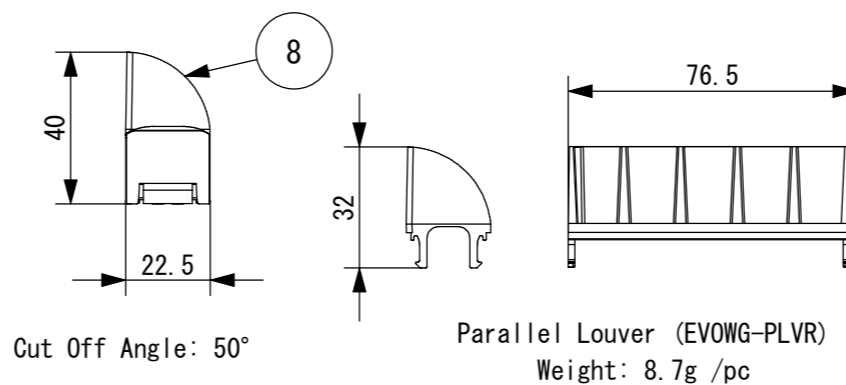

Note:

\*A dedicated control device is required for dimming and toning.

Specifications	
- Voltage	: 24VDC
- Wattage	: 1.5W /unit
- LED Color	: 22/27K : 2200K to 2700K 27/50K : 2700K to 5000K
- Beam Angle	: 42°
- CRI	: 85
- Mounting Directions	: Floor, Ceiling, Wall
*Additional Fixed Brackets are required for wall mounting.	

\* This product is for indoor use only.

\* Keep a distance of 100 mm or more from the light source to the illuminated object, or it may cause discoloration or deterioration of the objects.

No.	Parts 部品	Material 材料	Memo 備考
8	Parallel Louver	PC/ABS	Included, EVOWG-PLVR, Black
7	Fixed Bracket	SUS	Included
6	Flat Cable	PVC	White
5	Cord Protector	PVC	Black
4	Lead Wire	PVC	1.25mm <sup>2</sup> × 2
3	End Cover	PC	
2	Aluminum Extrusion	Aluminum	Black Anodized
1	LED Light Source	PC	

Date 日付	2023/7/3
Draft 製図	Y. Terabe
Check 検図	T. Inaba
Approve 承認	C. Ishibiki

Scale 縮尺	1:2
Weight 重量	Approx 410g/m
Unit 単位	mm
Size 用紙	A3

Title 名称	Tokilux EVOWG KT
Product No. 製品番号	EVOWGCP-KT-__/_K LED Color
 <b>TOKI CORPORATION</b> トキ・コーポレーション株式会社	