

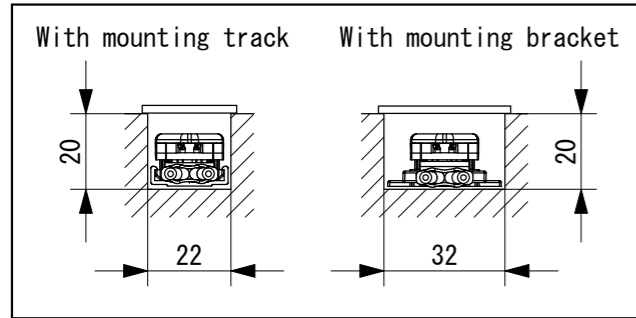



■ Minimum space requirements(A closed environment)

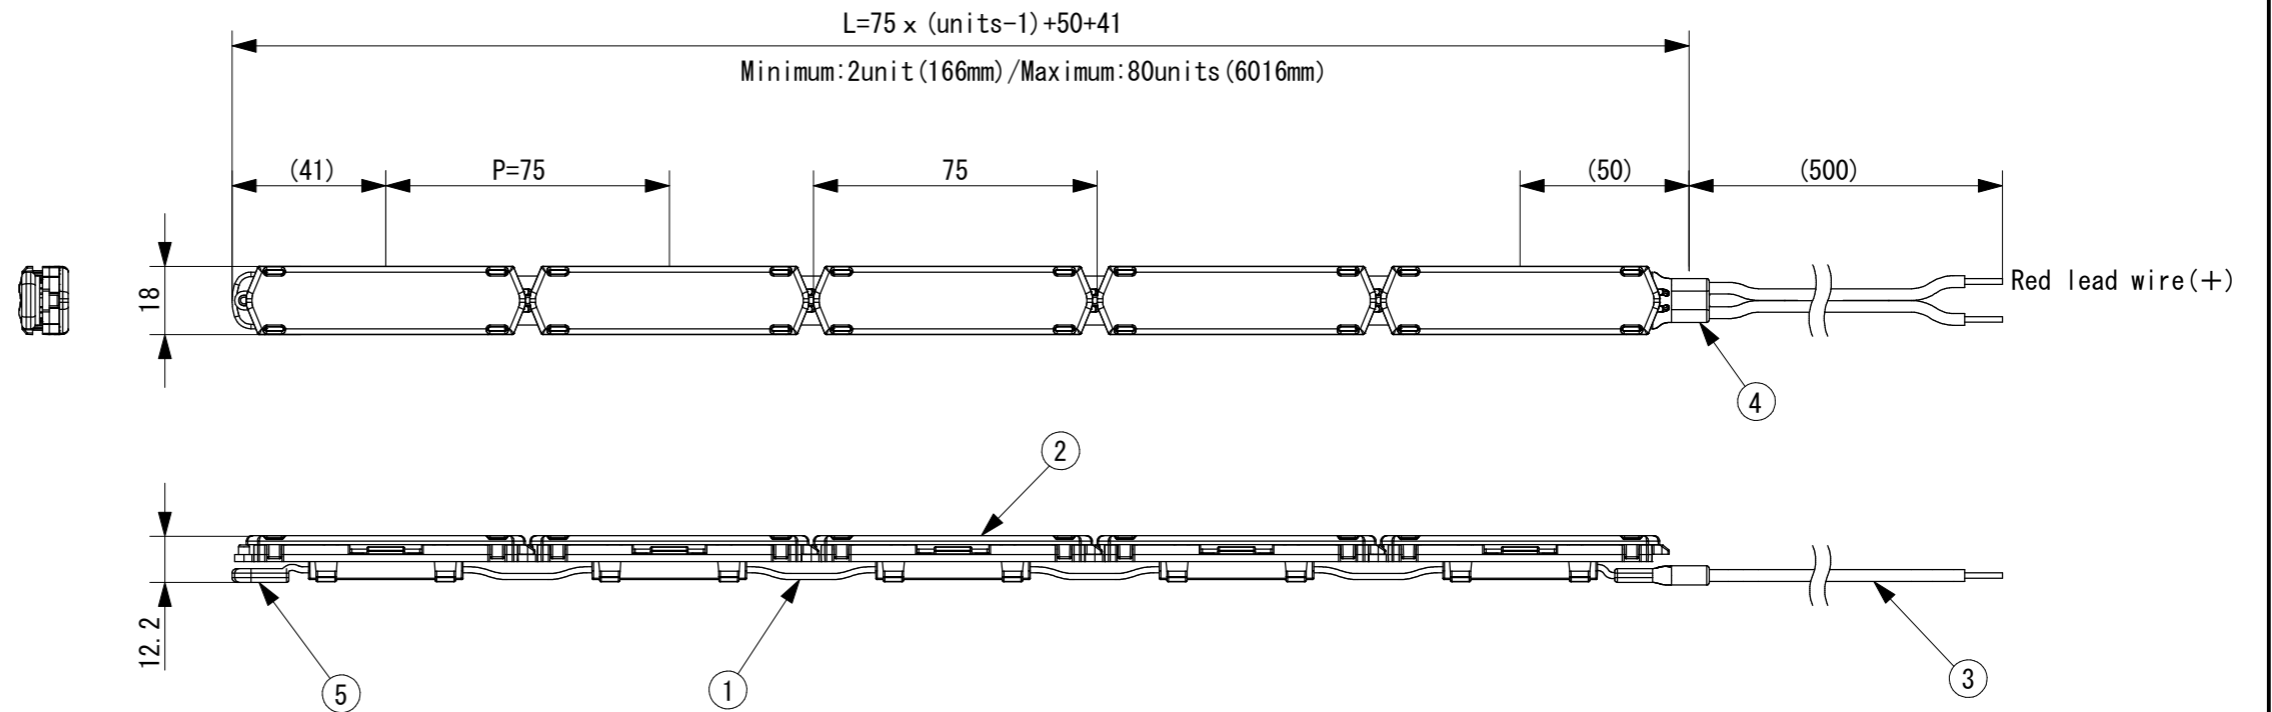


■ Curve installation

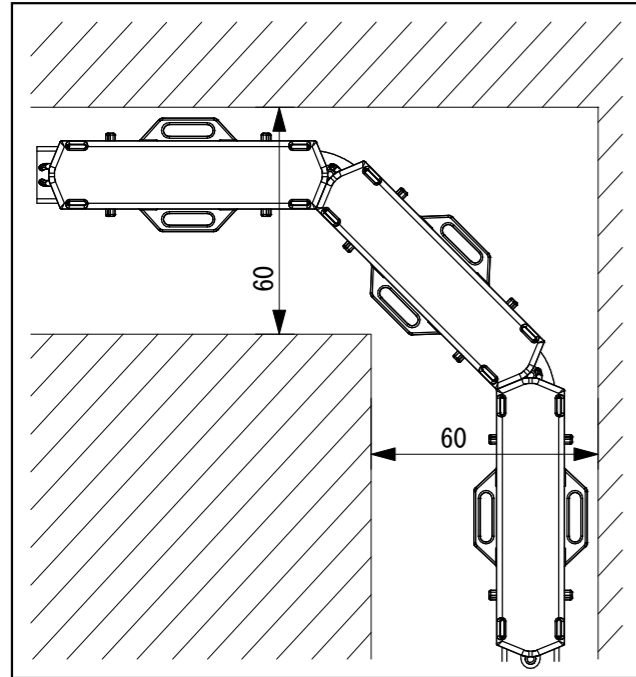

With mounting track (Option)

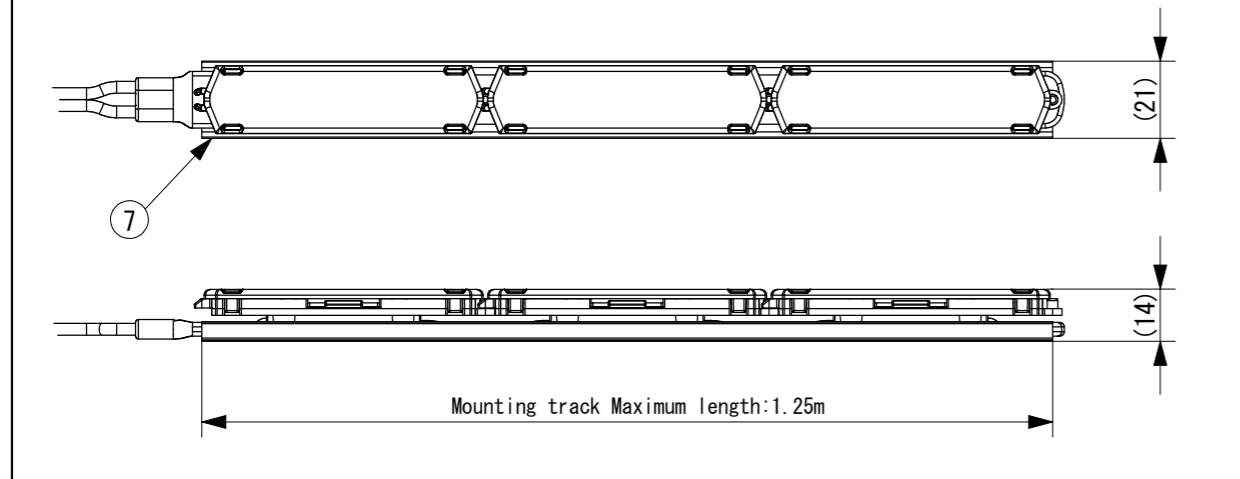

With mounting bracket (Option)

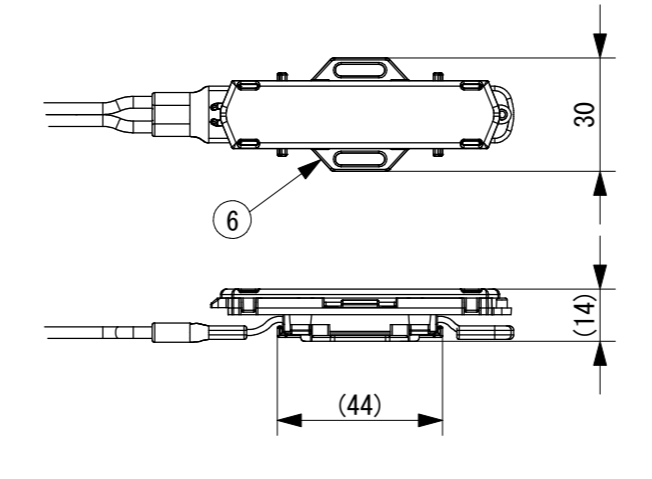

Specifications

- Voltage : 24VDC
- Wattage : 1.5W/Unit (75mm)
- LED Color : 2400K (24K)  
2700K (27K)  
3000K (30K)  
3500K (35K)  
4000K (40K)
- CRI : 85

7	Mounting track	PVC	P/N:MC20-1.25m (optional parts)
6	Mounting bracket	PC	P/N:EVO-CP (optional parts)
5	End cap	PVC	
4	Lead protector	PVC	
3	Lead wire	PVC	1.25mm <sup>2</sup> × 2
2	LED light source	PC	
1	Cable	PVC	
No.	Parts 部品	Material 材料	Memo 備考

Note:

- To prevent deterioration or discoloration, keep a distance of 100mm or more to the illuminated objects.
- When mounting vertically on a wall, be sure to secure the top module with the mounting bracket, and use with the mounting track.

Date 日付 2019. 10. 30  
 Draft 製図 Y. Terabe  
 Check 検図 T. Inaba  
 Approve 承認 C. Ishibiki

Scale 縮尺 1:2  
 Weight 重量 15g/Unit  
 Unit 単位 mm  
 Size 用紙 A3

Title 名称 Tokilux EVO  
 Product No. 製品番号 EVO-\_\_K  
 LED Color

TOKI CORPORATION  
 トキ・コーポレーション株式会社