

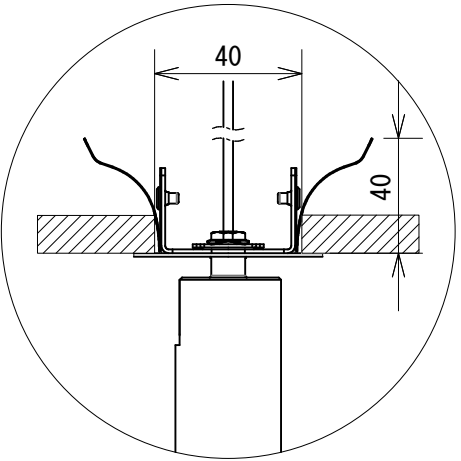


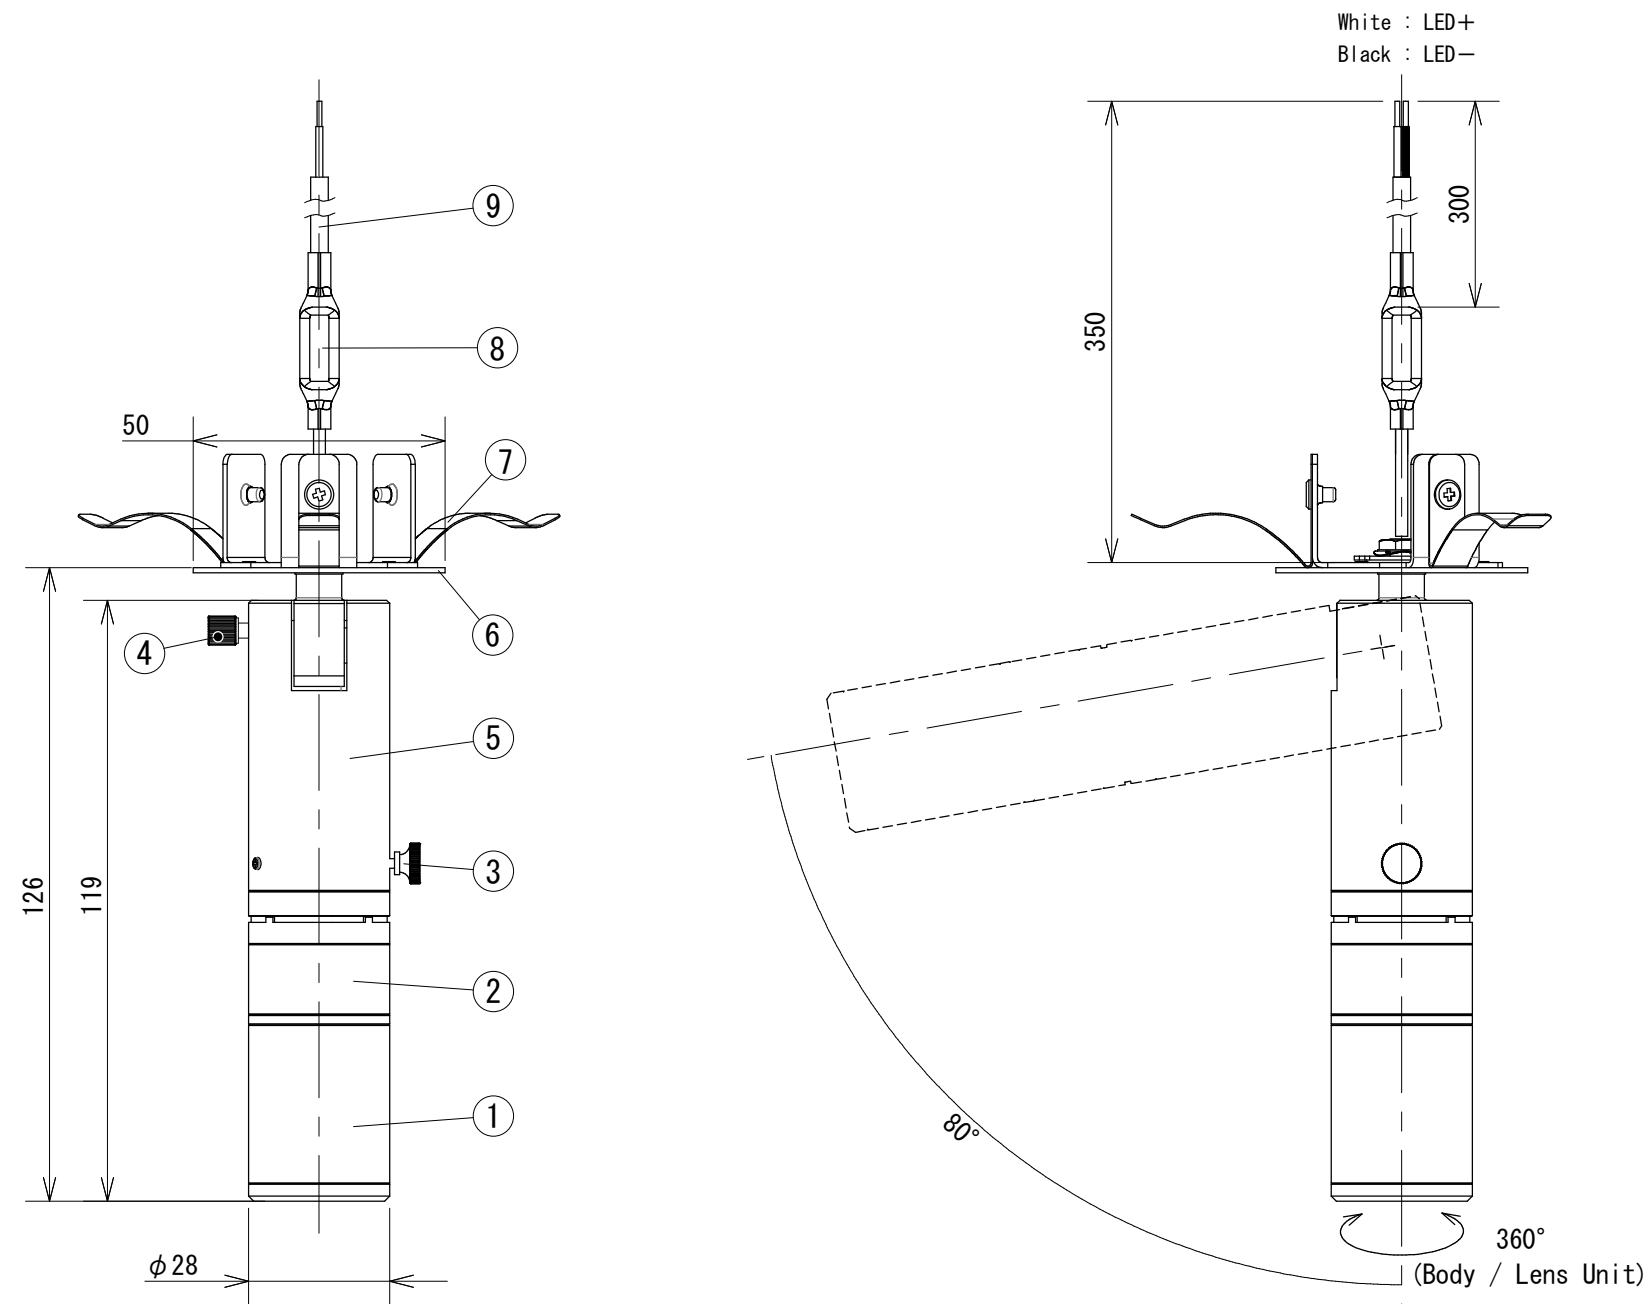

Scale 1:1

Panel thickness: 3 to 25mm
Required depth: 40mm
* To insert the power supply through cutout, the ceiling height must be 180mm or more.

Specifications	
- Voltage	: 35VDC
- Current	: 170mA
- Wattage	: 6.5W
- LED Color	: 3000K (HC30K) 4000K (HC40K) 5000K (50K) 6500K (65K)
- CRI	: 97 (HC30K, HC40K) 83 (50K) 75 (65K)
- Body Color	: Black (B), White (W)
- Dimming	: DALI
- Power Supply	: Dedicated LED driver (sold separately)

* For color GOBOs, the LED color temperature is 6500K.

Notes

- *This fixture is for indoor use only. Do not use it in humid, wet, or outdoor environments, as this may cause fire or electric shock.
- *Keep at least 0.5 m distance between the fixture and the illuminated object, or it may cause discoloration or deformation of the illuminated object.
- *This product is designed for ceiling installation only. Do not install it on walls or sloped ceilings.
- *Due to improvements in LED performance and variations in LED manufacturing, slight differences in color and brightness may occur among individual LEDs.
- *A specified constant-current LED driver is required for operation.
- *The GOBO plate is pre-installed in the fixture at the factory before shipment.

9	Lead Cable	PVC	AWG21×2
8	Protective Unit		
7	Mounting Spring	Metal	
6	Flange	Metal	Surface Finish (W:White, B:Black)
5	Body	Aluminum	Surface Finish (W:White, B:Black)
4	Knob - Large	Metal	Black, for joint lock
3	Knob - Small	Metal	Black, for lens unit rotation lock
2	[Lens Unit] Focus Adjustment	Aluminum	Surface Finish (W:White, B:Black)
1	[Lens Unit] Zoom Adjustment	Aluminum	Surface Finish (W:White, B:Black)
No.	Parts 部品	Material 材料	Memo 備考

Date 日付	2025/3/7	Scale 縮尺	1:1.5	Title 名称 28 GOBO SPOT (Recessed)
Draft 製図	Miwa	Weight 重量	200g	
Check 検図	Ishikawa	Unit 単位	mm	
Approve 承認	Ishibiki	Size 用紙	A3	
Product No. 製品番号 GB28M-EM- K- LED Color Body Color				 TOKI CORPORATION トキ・コーポレーション株式会社