




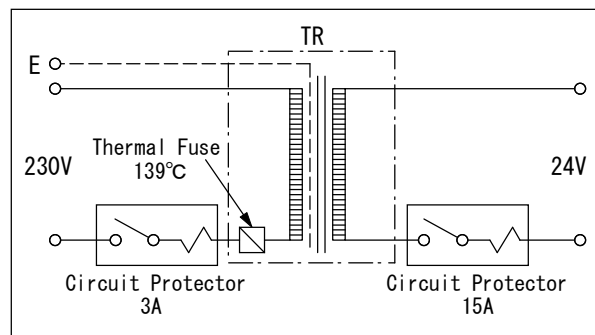


Specifications

- Input : 230VAC 50/60Hz 2.0A
- Output : 24VAC 320VA
- Power Factor : 0.97
- Operating Temp. : 0~40°C (Indoor use only)
- Surface Temp. : 36°C (Ambient 25°C)
- Heat Loss : 31.8kcal/h
- IP Code : IP20

Cable cable L=300
Black×2C : 24VAC No polarity

Cable cable L=300
Black×2C : 230VAC No polarity
Green/Yellow : Ground

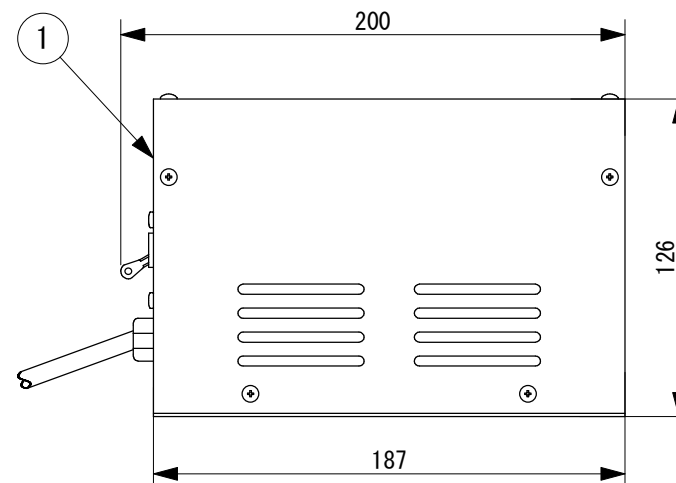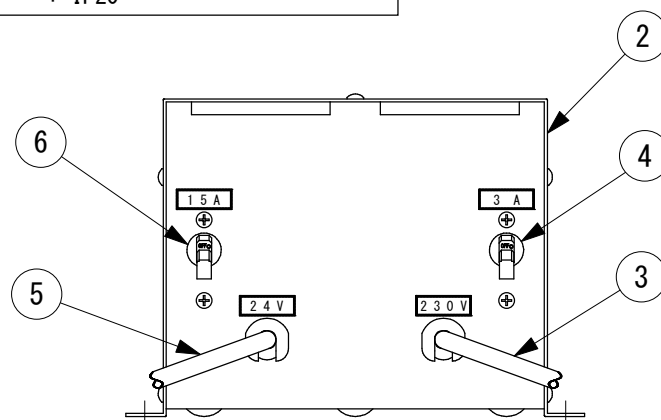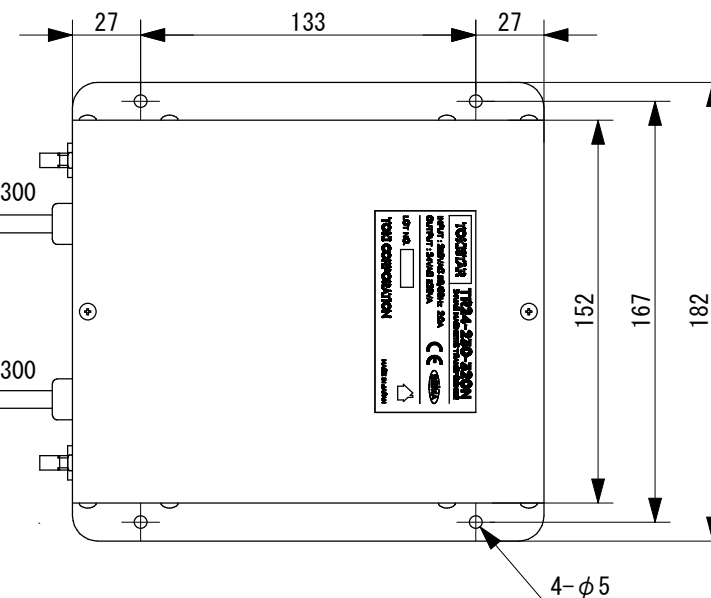

6	Output Breaker		15A
5	Output Cable	PVC	14AWG (2.5mm ²)
4	Input Breaker		3A
3	Input Cable	PVC	19AWG (0.75mm ²)
2	Top Cover	Al	Untreated Aluminum
1	Base Plate	SPC	
No.	Parts 部品	Material 材料	Memo 備考

Date 日付 2025/12/5
Draft 製図 Terabe
Check 検図 Fukumasu
Approve 承認 Ishibiki

Scale 縮尺 1:3
Weight 重量 Approx. 8.7Kg
Unit 単位 mm
Size 用紙 A4

Title 名称 24VAC Magnetic Transformer

Product No. 製品番号 TR-230-320N

TOKI CORPORATION
トキ・コーポレーション株式会社