

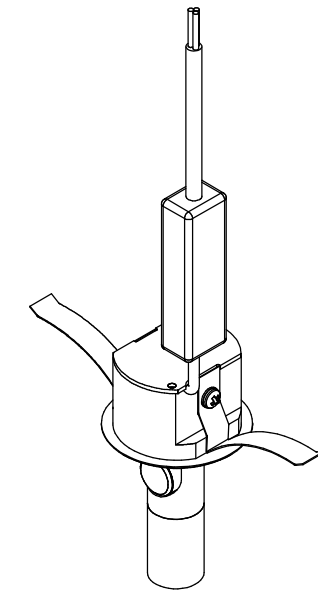
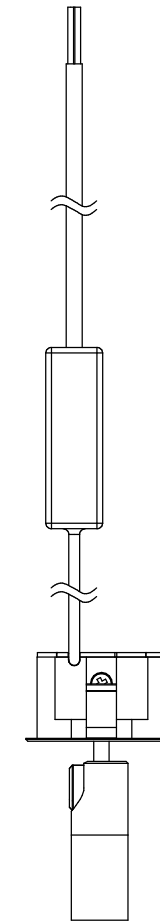


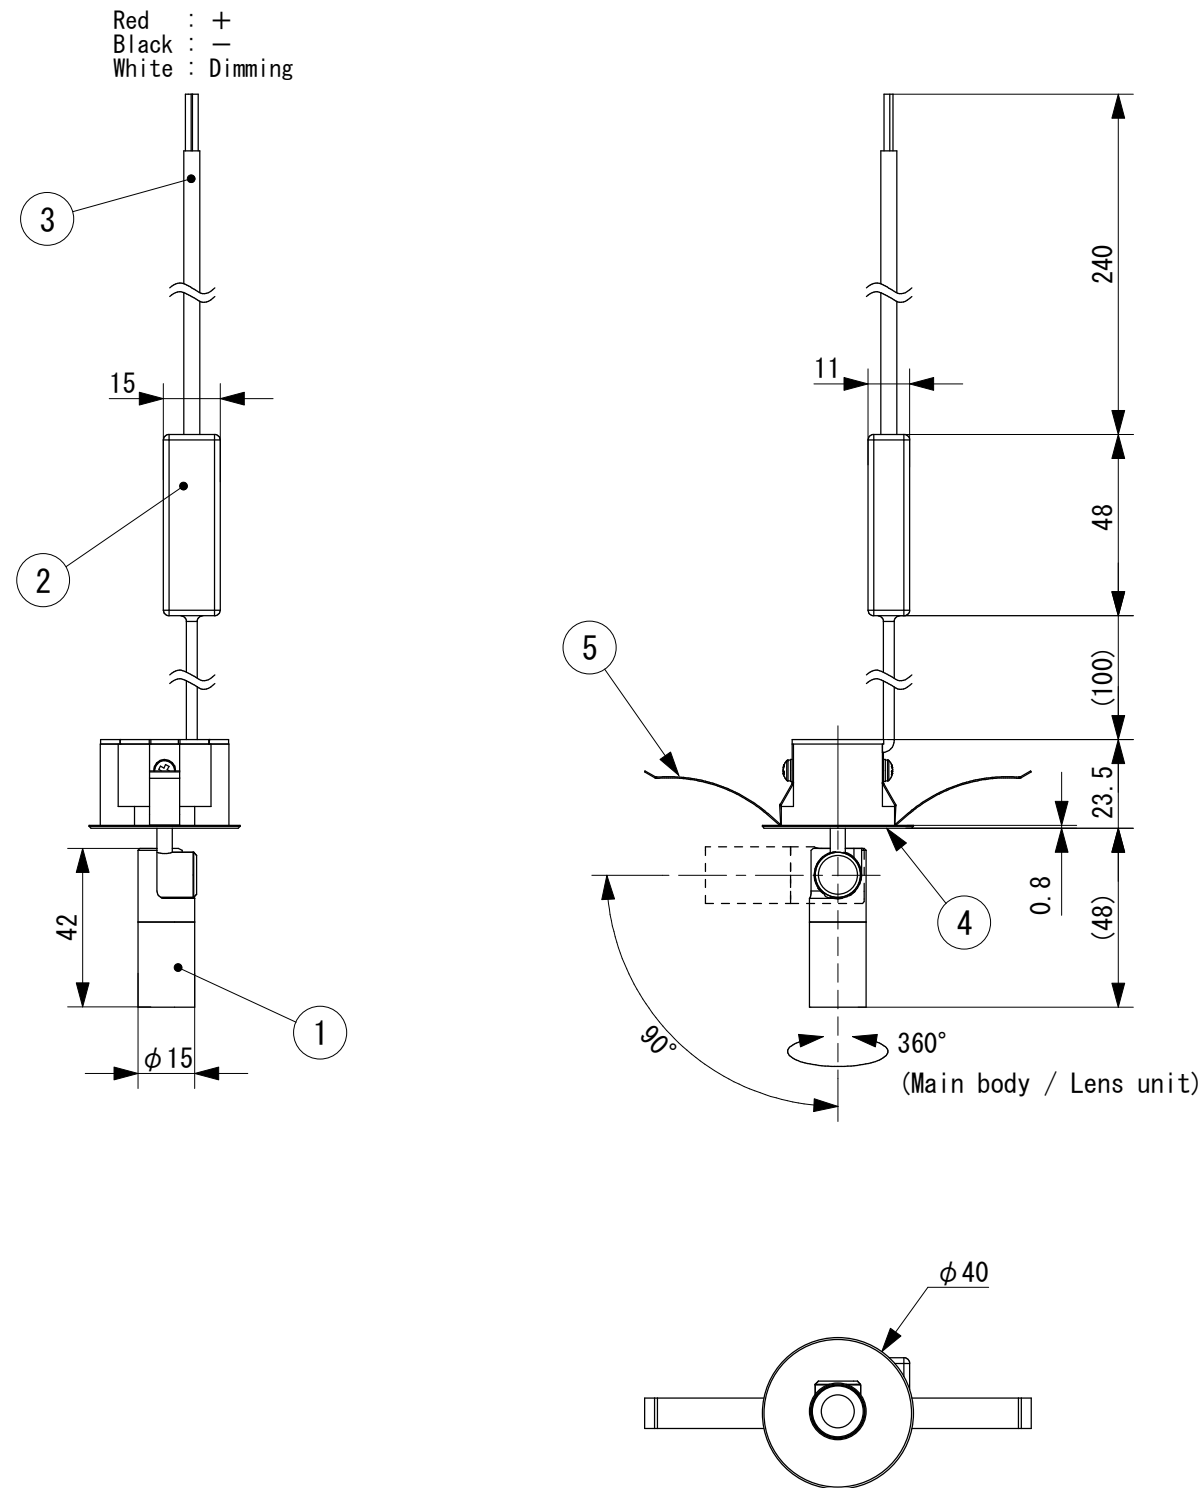

Minimum recessed depth: 40 mm
 *A minimum ceiling depth of 200 mm
 is required to insert the power
 supply through the cutout opening.
 *Not suitable for insulated ceilings.



Specifications	
- Voltage	: 24VDC
- Wattage	: 2.6W
- Weight	: 40g (Main unit) 60g(incl. control circuit)
- LED Color	: 2700K (27K, HC27K) 3000K (30K, HC30K) 3500K (35K, HC35K) 4000K (40K, HC40K) 5000K (50K, HC50K)
- CRI	: 85 (Standard) 95 (HC, High color rendering)
- Beam Angle	: 16° (16D) 24° (24D) 30° (30D)
- Body Color	: Black (B) White (W)
- Cutout	: ϕ 35mm
- Panel Thickness	: 2-25mm
- Beam Direction	: 35° to one side
- Remote power supply required	

6			
5	Retainer Clip	Metal	
4	Flange	Metal	Finish (W: White, B: Black)
3	Lead Wire	PVC	φ 4.4 (AWG21×3C)
2	Control Circuit	PA	L48×W15×H11
1	Body	AL	Finish (W: White, B: Black)
No.	Parts 部品	Material 材料	Memo 備考

Date 日付	2024/11/20	Scale 縮尺	1:2	Title	MICRO LIGHT CANNON
Draft 製図	Terabe	Weight 重量	***g	名称	(Recessed)
Check 検図	Mizusawa	Unit 単位	mm	Product No.	MLCEM01- K- D-
Approve 承認	Ishibiki	Size 用紙	A3	製品番号	LED Color Beam Angle Body Color





TOKI CORPORATION
トキ・コーポレーション株式会社