
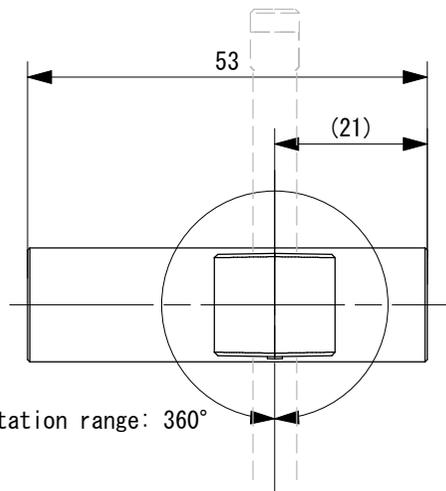


Installation direction mark

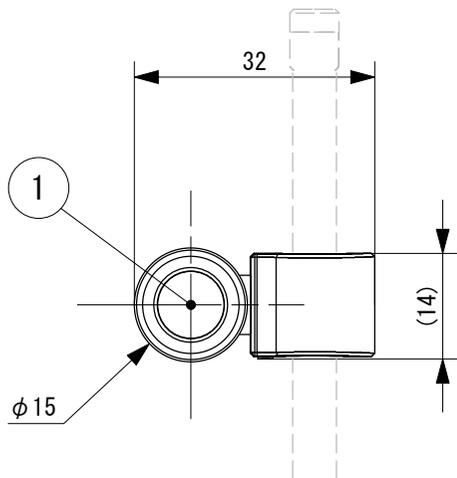

Rotation range: 360°

Specifications	
- Voltage	: 24VDC
- Wattage	: 1.7W/LED
- LED Color	: 2700K (27K, HC27K) 3000K (30K, HC30K) 3500K (35K, HC35K) 4000K (40K, HC40K) 5000K (50K, HC50K)
- CRI	: 85 (Standard) 95 (HC, High color rendering)
- Beam Angle	: 16° (16D), 24° (24D), 30° (30D)
- Body Color	: Black (B), Silver (S)

Configuration	2-unit installation
	Power Stand (sold separately) + Stand lead processing (sold separately)

6			
5			
4	Contact	Copper	
3	Dimming		Built into the main unit
2	Body	PC, Aluminum	
1	Lens	PMMA	
No.	Parts 部品	Material 材料	Memo 備考

Date 日付 2024/9/20
 Draft 製図 Y. Terabe
 Check 検図 T. Inaba
 Approve 承認 C. Ishibiki

Scale 縮尺 1:1
 Weight 重量 16g
 Unit 単位 mm
 Size 用紙 A4

Title 名称 ORBIT SPOT
 Product No. 製品番号 OBS02- K- D-
LED Color Beam Angle Body Color

 トキ・コーポレーション株式会社